


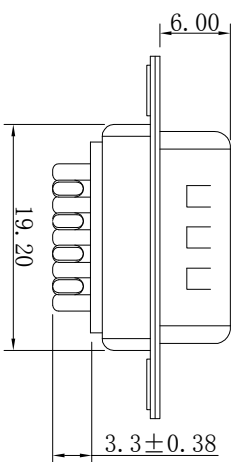
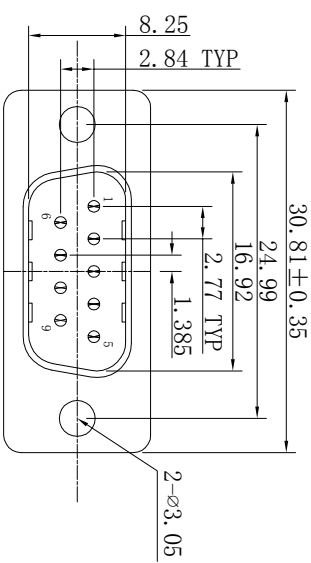


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

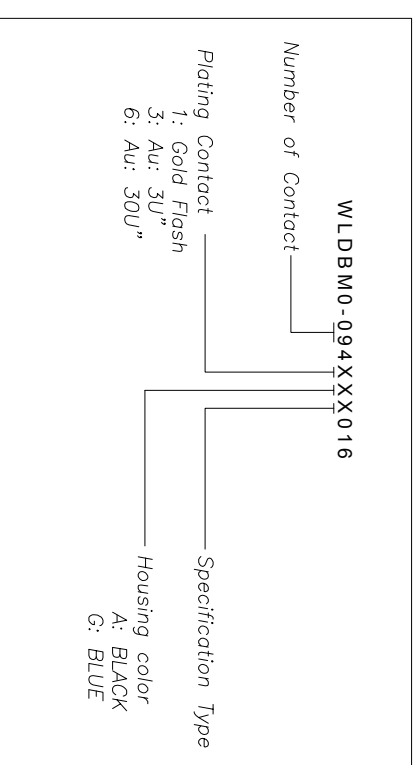

- CHARACTERISTICS/特性:
- 1、 RATED VOLTAGE: 250V AC CD
 - 2、 RATED CURRENT: 3.0AMP
 - 3、 CONTACT RESISTANCE: 30mΩ Max.
 - 4、 INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
 - 5、 Electric Pressure: Keeping 60 second in AC 500V/1mA
 - 6、 Operating temperature: -55℃~105℃
 - 7、 INSERTION/EXTRACTION FORCE PER CONTACT: 3.0Kg Max 0.3Kg Min.

Specification Type

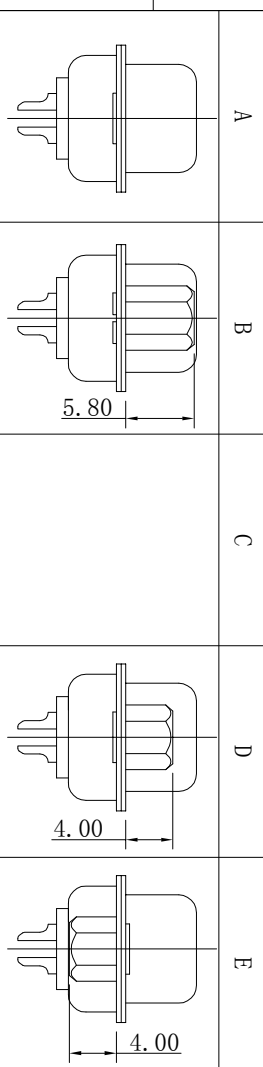

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:		NAME	DATE	PART:NO:	DWG:NO:	REV:	SHEET:
AO	NEW RELEASE	21.11.17	LINEAR	ANGLES	1:1	APPROVED	Wang_jr	21.11.17	WLD8M0-094XXX016	ENDE05	AO	1/1
			0.0±0.35	X°REF±6°		DESIGNER	Hon_Gao	21.11.17	TITLE:			
			UNIT:mm	X'±3°		DRAWN	Zijun_Huang	21.11.17	D-SUB 9P/M 传统端子			
			SIZE: A4	X'X' ±2°								

