












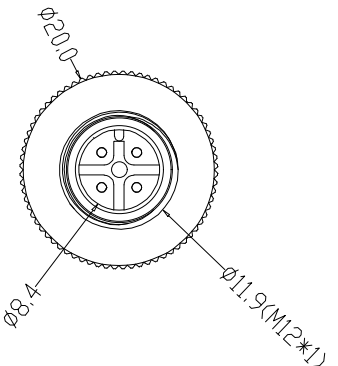
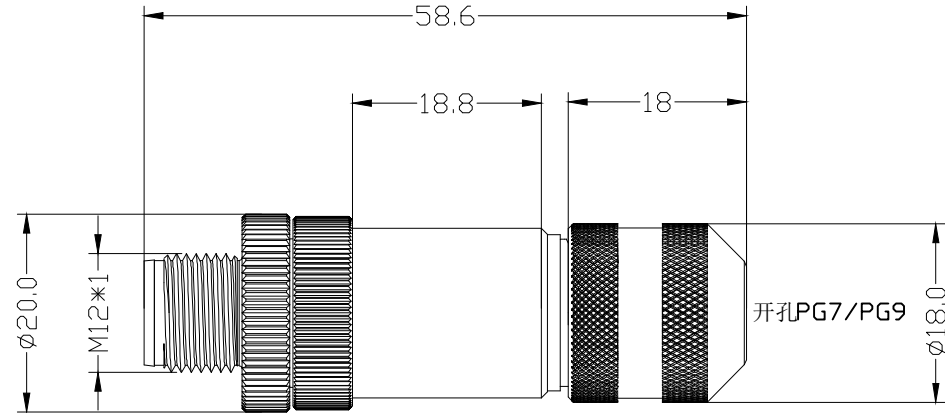


	1	2	3	4	5	6	7	8																																												
	The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements																																																			
A	pin位	2pin	3pin	4pin	5pin	6pin	7pin	8pin																																												
	X 值	1.00	1.00	1.00	1.00	0.80	0.80	0.80																																												
	A-CODE 图 形																																																			
B	B-CODE 图 形																																																			
C	D-CODE 图 形																																																			
D																																																				
E																																																				
F						<table><tr><td></td><td>PARTS</td><td>MATERIALS</td><td>TREATMENT</td><td>AMOUNT</td></tr><tr><td>A</td><td>HOUSING</td><td>PA66+GF</td><td>SPECIFY COLOR</td><td>1+1</td></tr><tr><td>B</td><td>CONTACT</td><td>BRASS</td><td>GOLD PLATED</td><td>2~8</td></tr></table>		PARTS	MATERIALS	TREATMENT	AMOUNT	A	HOUSING	PA66+GF	SPECIFY COLOR	1+1	B	CONTACT	BRASS	GOLD PLATED	2~8																															
	PARTS	MATERIALS	TREATMENT	AMOUNT																																																
A	HOUSING	PA66+GF	SPECIFY COLOR	1+1																																																
B	CONTACT	BRASS	GOLD PLATED	2~8																																																
G	<table><tr><td>Engagement force</td><td>≤50N</td><td>Rated voltage</td><td>2-5pin:60V 6-8pin:30V</td></tr><tr><td>Disengagement force</td><td>≥5N</td><td>Rated current</td><td>2-5pin:4A 6-8pin:2A</td></tr><tr><td>Mechanical lifespan</td><td>≥500</td><td>Insulation resistance</td><td>≥1000M Ω</td></tr><tr><td>IP rating</td><td>IP67</td><td>Contact resistance</td><td>≤10m Ω</td></tr><tr><td>Flammability</td><td>UL94 V-0</td><td>Operation Temperature</td><td>-40° C~105° C</td></tr></table>					Engagement force	≤50N	Rated voltage	2-5pin:60V 6-8pin:30V	Disengagement force	≥5N	Rated current	2-5pin:4A 6-8pin:2A	Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω	IP rating	IP67	Contact resistance	≤10m Ω	Flammability	UL94 V-0	Operation Temperature	-40° C~105° C	<table><tr><td>C</td><td>OUTER CONTACT</td><td>BRASS</td><td>NICKL PLATED</td><td>1</td></tr><tr><td>D</td><td>NUT</td><td>BRASS</td><td>NICKL PLATED</td><td>3</td></tr><tr><td>E</td><td>O-RING</td><td>EPDM</td><td>SPECIFY COLOR</td><td>3</td></tr><tr><td>F</td><td>SHIELD</td><td>BRASS</td><td>NICKL PLATED</td><td>1</td></tr><tr><td>G</td><td></td><td></td><td></td><td></td></tr></table>	C	OUTER CONTACT	BRASS	NICKL PLATED	1	D	NUT	BRASS	NICKL PLATED	3	E	O-RING	EPDM	SPECIFY COLOR	3	F	SHIELD	BRASS	NICKL PLATED	1	G					
Engagement force	≤50N	Rated voltage	2-5pin:60V 6-8pin:30V																																																	
Disengagement force	≥5N	Rated current	2-5pin:4A 6-8pin:2A																																																	
Mechanical lifespan	≥500	Insulation resistance	≥1000M Ω																																																	
IP rating	IP67	Contact resistance	≤10m Ω																																																	
Flammability	UL94 V-0	Operation Temperature	-40° C~105° C																																																	
C	OUTER CONTACT	BRASS	NICKL PLATED	1																																																
D	NUT	BRASS	NICKL PLATED	3																																																
E	O-RING	EPDM	SPECIFY COLOR	3																																																
F	SHIELD	BRASS	NICKL PLATED	1																																																
G																																																				
H	REV. A0	REVISION RECORD NEW RELEASE	DATE		<table><tr><th colspan="2">GENERAL TOLERANCES</th><th rowspan="2">SCALE: 1:1</th><th rowspan="2">NAME</th><th rowspan="2">DATE</th><th rowspan="2">PART.NO: M12XXX-01-012</th><th rowspan="5">DWG.NO: ENDE05</th><td colspan="2" rowspan="5"></td></tr><tr><th>LINEAR</th><th>ANGLES</th></tr><tr><td>0.0±0.35</td><td>X°REF±6°</td><td>APPROVED</td><td></td><td></td><td colspan="4" rowspan="3">TITLE: M12组装式金属款屏蔽系列 公直头 ABD 编码 螺钉压接</td></tr><tr><td>UNIT:mm 0.00±0.25</td><td>X°±3°</td><td>DESIGNER</td><td></td><td></td></tr><tr><td>SIZE: A4 0.000±0.10</td><td>X°X' ±2°</td><td>DRAWN</td><td></td><td></td></tr></table>	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: M12XXX-01-012	DWG.NO: ENDE05			LINEAR	ANGLES	0.0±0.35	X°REF±6°	APPROVED			TITLE: M12组装式金属款屏蔽系列 公直头 ABD 编码 螺钉压接				UNIT:mm 0.00±0.25	X°±3°	DESIGNER			SIZE: A4 0.000±0.10	X°X' ±2°	DRAWN																			
GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: M12XXX-01-012	DWG.NO: ENDE05																																														
LINEAR	ANGLES																																																			
0.0±0.35	X°REF±6°	APPROVED			TITLE: M12组装式金属款屏蔽系列 公直头 ABD 编码 螺钉压接																																															
UNIT:mm 0.00±0.25	X°±3°	DESIGNER																																																		
SIZE: A4 0.000±0.10	X°X' ±2°	DRAWN																																																		
	1	2	3	4	5	6	7	8																																												