

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

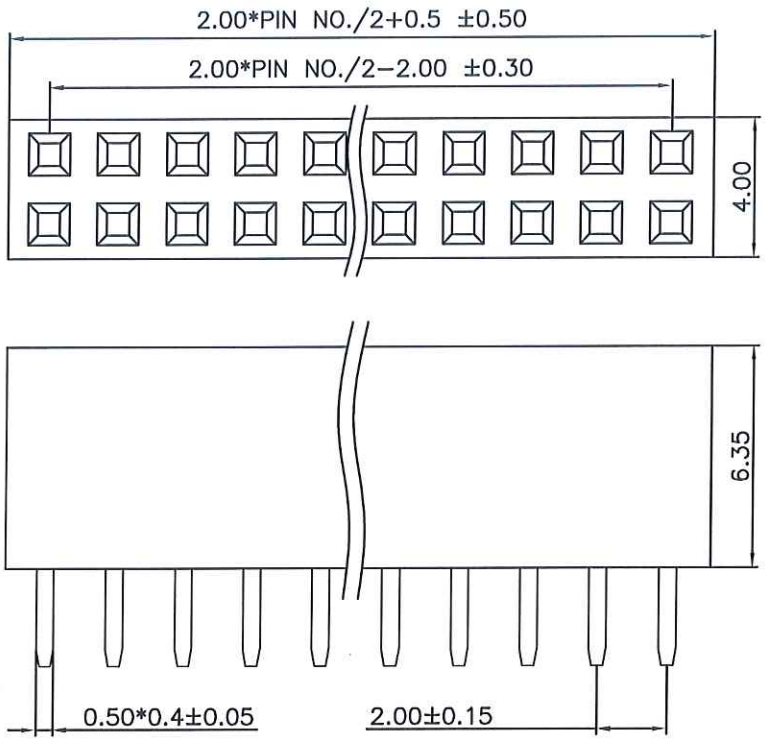

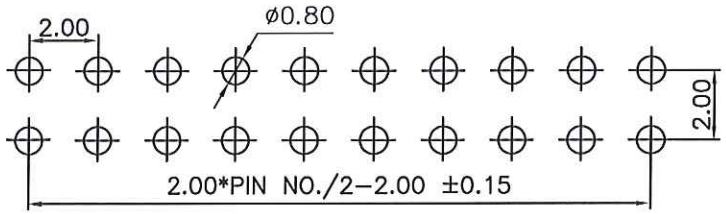

RECOMMEND P.C.B LAYOUT

PCB TOLERANCE: ±0.05 (TOP VIEW)

NOTE:
1.MATERIAL SPECIFICATION:
  1-1.HOUSING: UL94V-0
  1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
  2-1.CONTACTS:
    GOLD FLASH PLATED OVER NI.
3.ELECTRICAL PERFORMANCE:
  3-1.CURRENT RATING: 2A AC/DC
  3-2.CONTACT RESISTANCE: 30 mΩ MAX
  3-3.INSULATION RESISTANCE: 1000MΩ Min
  3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
  4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: TRAY
6.P/N:

FH2005 64 F 0-2 XX 1 X X X 05

- SERIES NO:
- HEIGHT: 64: 6.35mm
- MALE FEMALE: F-FEMALE
- ANGLE: 0-180°
- ROW NO: 2-DOUBLE ROW
- PIN Q'PY: 04~64
- TERMIPOINT: 1-DIP
- PLATING: A-ALL AU G/F
- COLOR: A-BLACK
- HOUSING: 1-PA6T

广东万连科技有限公司 2024.12.27 产品中心 技术文件发行章

REV.	REVISION RECORD	DATE
A0	NEW RELEASE	24.12.25

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.35	X°REF±6°
UNIT: mm 0.00±0.25	X°±3°
SIZE: A4 0.000±0.10	X°X' ±2°

SCALE: 1:1	NAME	DATE
APPROVED	24.12.27	
DESIGNER	24.12.27	
DRAWN	24.12.27	

PART.NO: FH200564F0-2XX1XXX05

DWG.NO: ENDE05

TITLE: Pitch 2.0mm 180° 双排 DIP 型排母 H6.35

万连科技 WanLian Technology Co., Ltd

REV: A0 SHEET: 1/1