


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

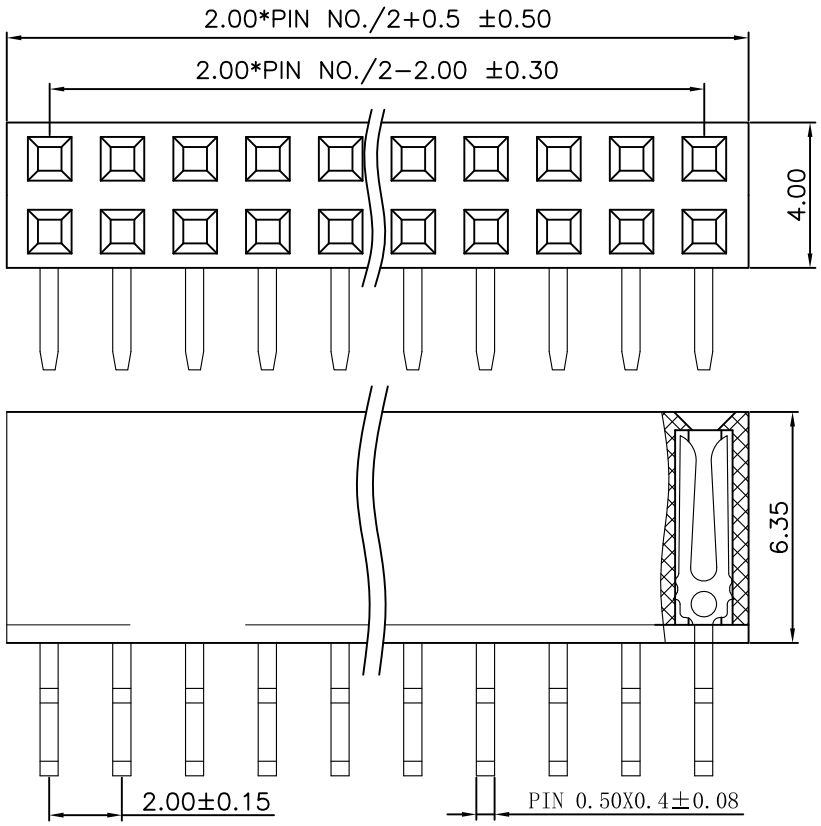

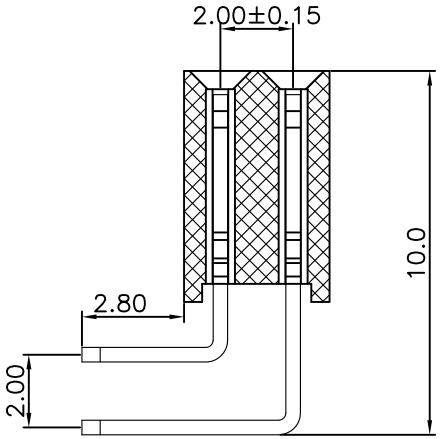

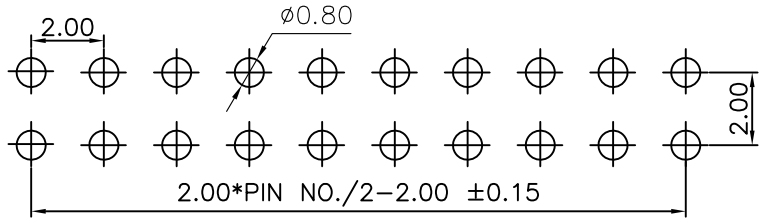

RECOMMEND P.C.B LAYOUT

PCB TOLERANCE: ±0.05 (TOP VIEW)

RoHS

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH PLATED OVER NI.
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 2A AC/DC
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: TUBE
6.P/N:

FH2005 64 F 9-2 XX 1 X X X 06

- SERIES NO:
- HEIGHT: 64: 6.35mm
- MALE FEMALE: F-FEMALE
- ANGLE: 9-90°
- ROW NO: 2-DOUBLE ROW
- PIN Q'PY: 04~64
- TERMIPOINT: 1-DIP
- PLATING: A-ALL AU G/F
- COLOR: A-BLACK
- HOUSING: 1-PA6T

REV.	REVISION RECORD	DATE
A0	NEW RELEASE	22.05.09

UNIT: mm

SIZE: A4

GENERAL TOLERANCES	
LINEAR	ANGLES
0.0±0.35	X°REF±6°
0.00±0.25	X°±3°
0.000±0.10	X°X' ±2°

SCALE: 1:1	NAME	DATE
APPROVED	Wang_jr	22.05.09
DESIGNER	Han_Gao	22.05.09
DRAWN	LanXuan_Hou	22.05.09

PART.NO: FH200564F9-2XX1XXX06

DWG.NO: ENDE05

TITLE: Pitch 2.0mm 90° 双排 DIP 型排母 H6.35W4.0

万连科技 WanLian Technology Co., Ltd

REV: A0 SHEET: 1/1