



The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

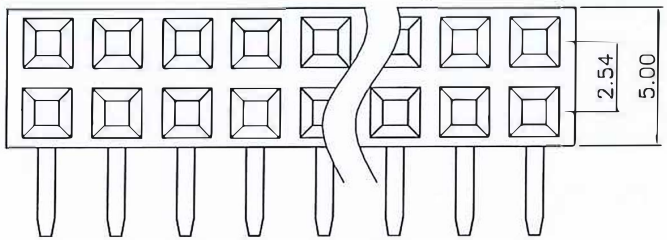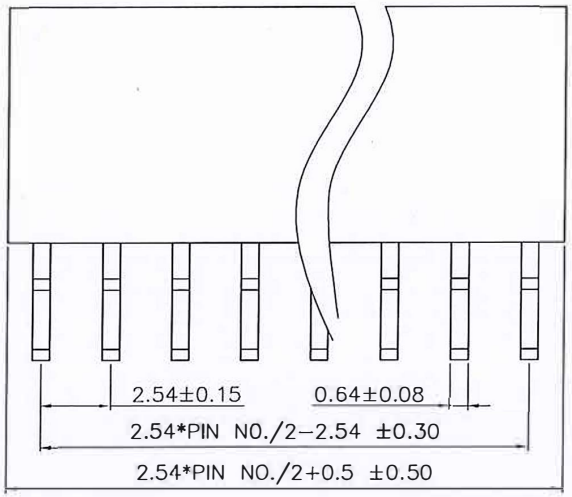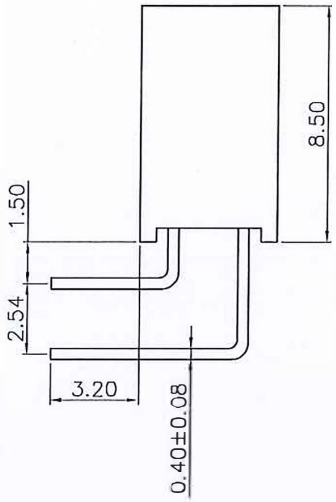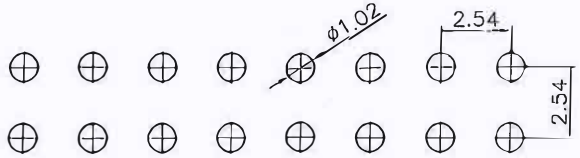


RECOMMENDED P.C.B LAYOUT

P.C.B TOLERANCE: ±0.05

RoHS

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA6T,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH OVER NICKEL
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 500V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: TRAY
6.P/N:

FH2541 85 F 9-2 XX 1 X X X 06

- SERIES NO:
- HEIGHT: 85: 8.5mm
- MALE FEMALE: F-FEMALE
- ANGLE: 9-90°
- ROW NO: 2-DOUBLE ROW
- PIN Q'PY: 04~80
- TERMIPOINT: 1-DIP
- PLATING: A-ALL AU G/F
- COLOR: A-BLACK
- HOUSING: 1-PA6T

| REV. | REVISION RECORD | DATE |
|---|---|---|
| A0 | NEW RELEASE | |
| | | |
| | | |
| | | |

| GENERAL TOLERANCES | |
|---|---|
| LINEAR | ANGLES |
| 0.0±0.35 | X°REF±6° |
| UNIT: mm 0.00±0.25 | X°±3° |
| SIZE: A4 0.000±0.10 | X°X' ±2° |

| SCALE: | NAME | DATE |
|---|---|---|
| APPROVED | | |
| DESIGNER | | |
| DRAWN | | |

PART.NO: FH254185F9-2XX1XXX06

DWG.NO: ENDE05

TITLE: 2.54双排母H8.5W5.0 90度 PC3.2

万连科技 WanLian Technology Co., Ltd

REV: A0 SHEET: 1/1