




The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements


RoHS

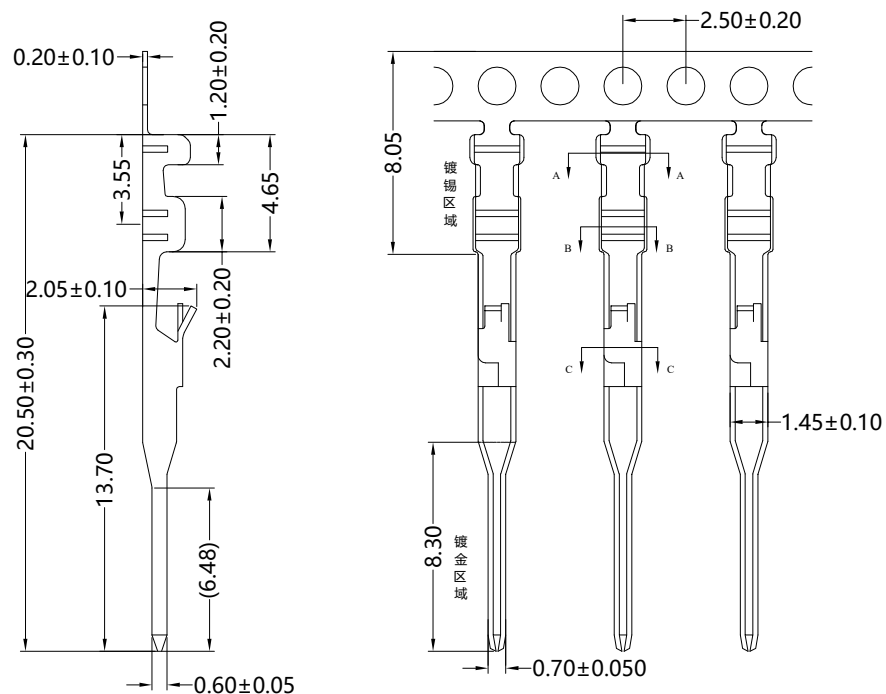

SEC:A-A



SEC:B-B




SEC:C-C

- NOTE:
- MATERIAL SPECIFICATION:  
1-1.CONTACTS: PHOSPHOR BRONZE
  - PLATING SPECIFICATION:  
2-1.CONTACTS:  
TIN/GOLD FLASH PLATED OVER ALL.
  - MECHANICAL PERFORMANCE:  
3-1.RETENTIVITY FORCE: 1.5KGF/pin min  
3-2.DURABILITY: 50 CYCLES.
  - ELECTRICAL PERFORMANCE:  
4-1.CURRENT RATING: 3A AC/DC  
RATED VOLTAGE : 250V AC/DC  
4-2.CONTACT RESISTANCE: 20 mΩ MAX  
4-3.INSULATION RESISTANCE: 100MΩ Min  
4-4.DIELECTRIC WITHSTANDING : 1500V
  - ENVIRONMENTAL PERFORMANCE:  
5-1.OPERATING TEMPERATURE: -25°C~+85°C.
  - PACKAGE SPEC: REEL
  - P/N:

SERIES NO: A2547 T 1 M X-X  
CONNECTOR: T-TERMINAL  
TYPE CODE: M X-X  
PLATING:  
1-G/F  
A-ALL AU G/F  
C-BRIGIE TIN  
D-MATTE TIN  
METAL:  
P-PHOSPHOR BRONZE  
B-BRASS

开口向上

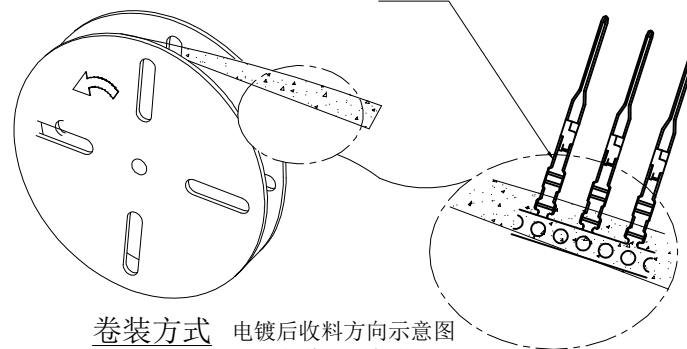

卷装方式 电镀后收料方向示意图  
(打线开口朝上)

Ordering Information & Specifications

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A2547T1MP-C	AWG#22-#24	1.63mm(max)	Phosphor Bronze	Tin Plated	15,000pcs
A2547T1MP-1	AWG#22-#24	1.63mm(max)	Phosphor Bronze	Contact Gold Flash Bottom Nickel	15,000pcs

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1	APPROVED	Wang_jr	21.11.17	A2547T1MX-X	
			0.00±0.25	X'±3'		DESIGNER	Han_Gao	21.11.17	TITLE:		REV: A0
			0.000±0.10	X'X' ±2'		DRAWN	Zijun_Huang	21.11.17	Pitch 2.54mm MX单排公端子 AWG#22-#24		SHEET: 1/1