

Specifications:
 Rated Voltage : 100V AC/DC
 Rated Current : 2A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

12001W00-NPX-D-HF
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
- ⑤ D : D Type
- ⑥ HF : Halogen Free

PART NO.	Dimensions	
	A	B
2P	--	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00

Part No.	Material	Color	PIN Material
12001W00-NP-D-HF	Nylon 66,UL94V-0	Natural(White)	Brass/Tin-plated

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE 1:1	NAME	DATE
AO	The new version file were released	2021.11.11	LINEAR	ANGLES	APPROVED		
A1	Revise drawings according to actual products	2022.05.24	0.0±0.25	X° REF±6°	DESIGNER		
			UNIT: MM	0.00±0.15	X° ±3°	DRAWN	YJT
			SIZE: A4	0.000±0.08	X° X' ±2°		2022.05.24

PART NO.	DWG NO.
12001W00-NP-D-HF	ENDE05
TITLE	
2.00mm PITCH DIP TYPE 180° WAFER	




JCTC®
 TERMINAL&CONNECTORS

REV	A1	SHEET	1/2
-----	----	-------	-----

1. 每袋/1000PCS

2. 10袋/10000PCS

3. 贴出货标签

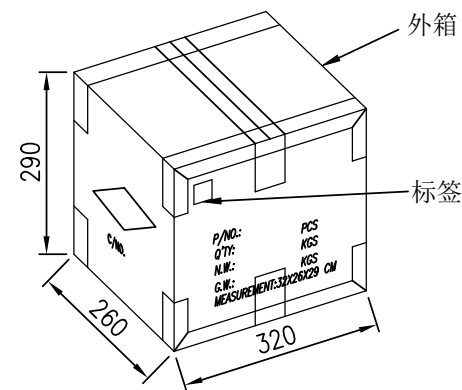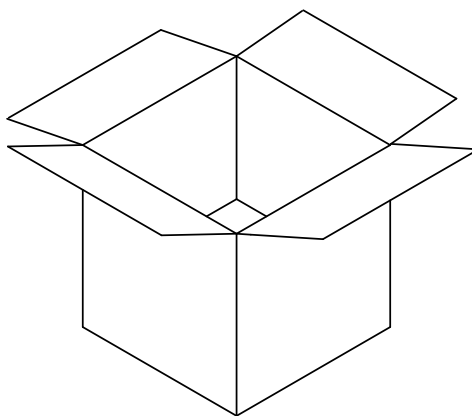

包装要求:

1. 每袋包装1000PCS，并放入一包干燥剂；
2. 每袋贴上标签；
3. 每纸箱包装10袋共计10000PCS；
4. 纸盒外贴上总标签；

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE 1:1	NAME	DATE	PART NO.	DWG NO.	 JCTC ® TERMINAL&CONNECTORS	
AO	The new version file were released	2021.11.11		LINEAR	ANGLES	APPROVED			12001W00-NP-D-HF	ENDE05		
A1	Revise drawings according to actual products	2022.05.24	UNIT: MM	0.00±0.15	X° REF±6°	DESIGNER			TITLE 2.00mm PITCH DIP TYPE 180° WAFER			
			SIZE: A4	0.000±0.08	X° X' ±2°	DRAWN	YJT	2022.05.24	REV	A1		SHEET