
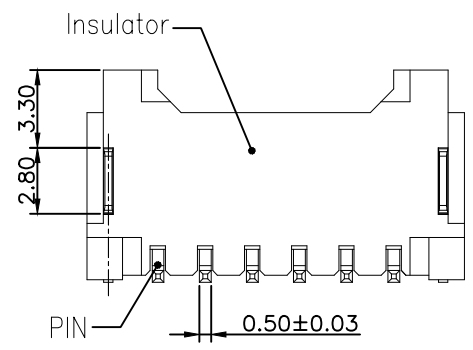
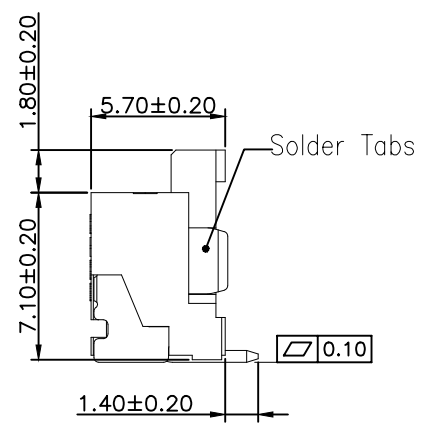
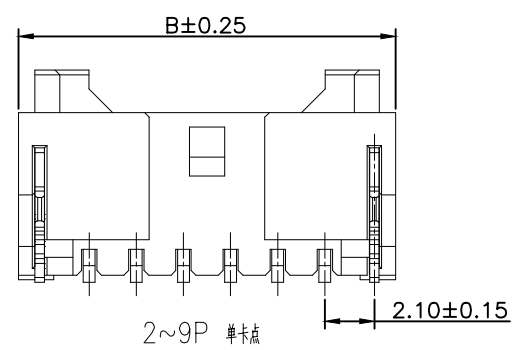

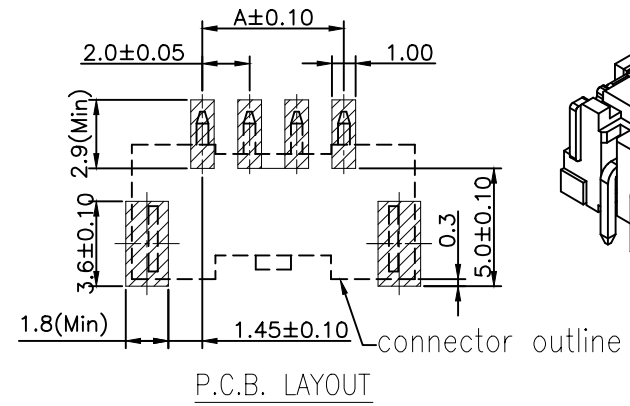


10~16P 双触点
SCALE 0.8:1

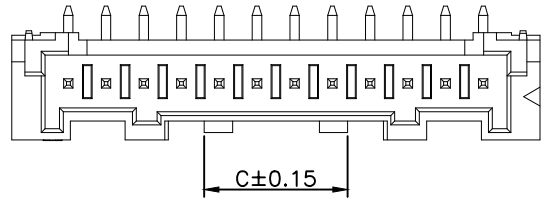

- 12002W00-NP-SA-NK-2
① ② ③ ④ ⑤ ⑥ ⑦
- ① Series No.
 - ② W90 : Side Contact
W00 : Up Contact
 - ③ No. of Circuits
 - ④ S : SMT TYPE
 - ⑤ A : A TYPE
 - ⑥ NK : No Mark
 - ⑦ 2 : PE BAG(Without Cap)

Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 3A AC,DC
 Withstand Voltage : 800V AC/minute
 Contact Resistance : 10mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

Circuits Part No	Dimensions		
	A	B	C
2P	---	8.00	0.78
3P	4.00	10.00	1.20
4P	6.00	12.00	1.50
5P	8.00	14.00	1.50
6P	10.00	16.00	1.50
7P	12.00	18.00	1.50
8P	14.00	20.00	1.50
9P	16.00	22.00	1.50
10P	18.00	24.00	7.60
11P	20.00	26.00	7.60
12P	22.00	28.00	7.60

Part No.	Insulator	Color	Pin Material	Solder Tabs
12002W00-NP-SA-NK-2	High temperature plastic,UL94V-0	Natural(Beige)	Brass/Tin-plated	Brass/Tin-plated

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.				
A0	The new version file were released	24.07.25	LINEAR	ANGLES	1:1			12002W00-NP-SA-NK-2	ENDE05				
			0.0±0.25	X° REF±6°	APPROVED								
			0.00±0.15	X° ±3°	DESIGNER								
			0.000±0.08	X° X' ±2°	DRAWN	ZJH	24.07.25						
			UNIT: MM		TITLE				REV				
			SIZE: A4		PA 2.00mm PITCH 180° SMT WAFER (Without Cap)				AO	SHEET	1/1		