




2~4P




5P

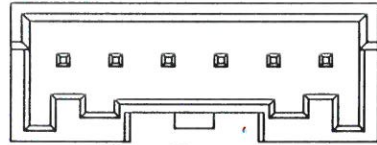


6P

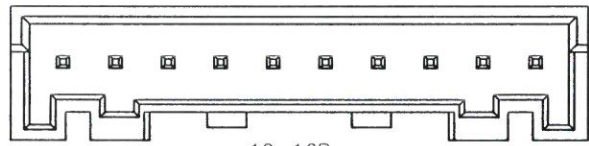





10~16P

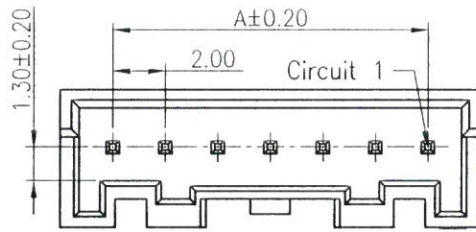

7~9P

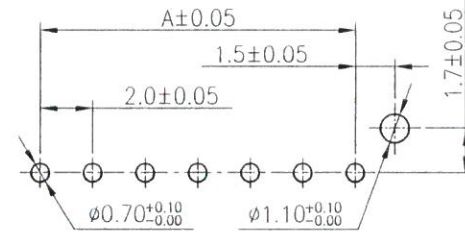

P.C.B. LAYOUT

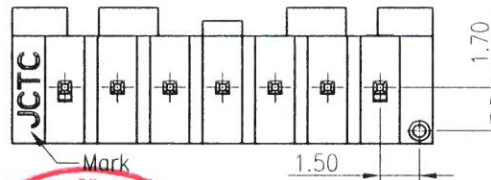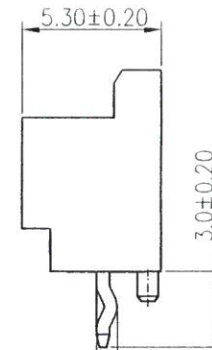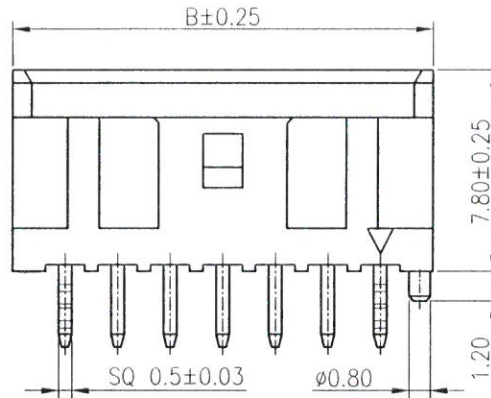

PART NO.	Dimensions	
	A	B
2P	--	6.00
3P	4.00	8.00
4P	6.00	10.00
5P	8.00	12.00
6P	10.00	14.00
7P	12.00	16.00
8P	14.00	18.00
9P	16.00	20.00
10P	18.00	22.00
11P	20.00	24.00
12P	22.00	26.00
13P	24.00	28.00
14P	26.00	30.00
15P	28.00	32.00
16P	30.00	34.00

12002W00-NP-L-F-HF

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② W90 : Side Contact
W00 : Up Contact
- ③ No. of Circuits
- ④ L : With Lock
- ⑤ F : With Boss
- ⑥ HF : Halogen Free

Specifications:

Rated Voltage : 250V AC/DC

Rated Current : 3A AC,DC

Withstand Voltage : 800V AC/minute

Contact Resistance : 10mΩ(MAX.)

Insulation Resistance : 1000MΩ(MIN.)

Temperature Range : -25°C~+85°C

The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements



Part No.	Insulator	Color	Contact
12002W00-NP-L-F-HF	Nylon 66, UL94V-0	Natural (White)	Brass/Tin-plated
12002W00-NPA-L-F-HF	Nylon 66, UL94V-0	Black	Brass/Tin-plated
12002W00-NPC-L-F-HF	Nylon 66, UL94V-0	Red	Brass/Tin-plated
12002W00-NPE-L-F-HF	Nylon 66, UL94V-0	Yellow	Brass/Tin-plated
12002W00-NPF-L-F-HF	Nylon 66, UL94V-0	Green	Brass/Tin-plated
12002W00-NPG-L-F-HF	Nylon 66, UL94V-0	Blue	Brass/Tin-plated

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE	NAME	DATE	PART NO.	DWG NO.			
C0	新图面发行	2004. 10. 28	LINEAR	1:1			12002W00-NPX-L-F-HF	ENDE05			
C2	YB2110090003	2021. 10. 20	0.0±0.25	APPROVED	mm	24.06.07					
C3	YB202312110005	2024. 02. 19	0.00±0.15	DESIGNER	SP peng	24.06.07					
C4	YB202405300001	2024. 06. 07	0.000±0.08	DRAWN	Noah	24. 06. 07					
							TITLE	PA 2.00mm PITCH DIP TYPE WAFER			
								REV	C4	SHEET	1/1

