
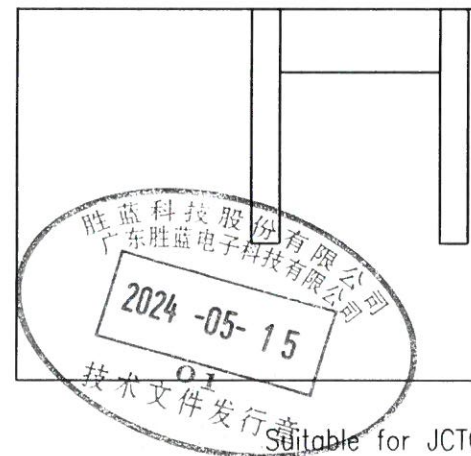
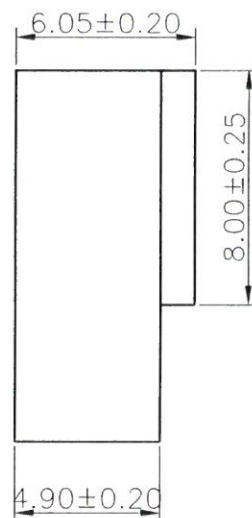


Specifications:
 Rated Voltage : 250V AC/DC
 Rated Current : 2.5A AC,DC
 Withstand Voltage : 1500V AC 7 minute
 Contact Resistance : 20mΩ(MAX)
 Insulation Resistance : 1000MΩ(MIN)
 Temperature Range : -25°C~+85°C
 Pitch Between Poles : 2.54mm
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

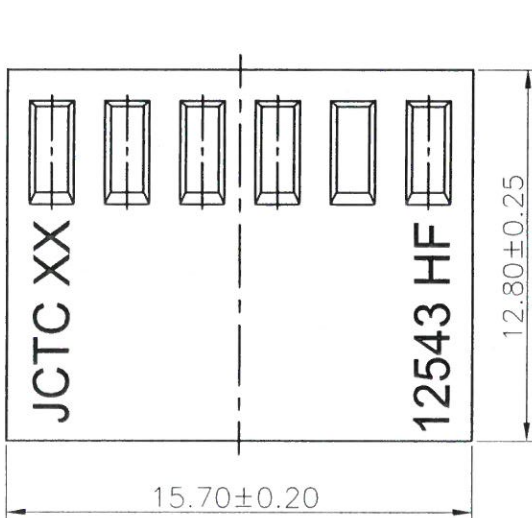

12543H00-6PX-A-HF
 ① ② ③④⑤

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
Blank: Natural type
- ⑤ A : Mount type
- ⑥ HF : Halogen Free

Suitable for JCTC 12543 series terminal

Part No.	Material	Color
12543H00-6PK-A-HF	Nylon66,UL 94V-0	白色
12543H00-6PM-A-HF	Nylon66,UL 94V-0	米黄色

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE	NAME	DATE	PART NO.	DWG NO.		
AO	Initial Release	15.09.16	LINEAR	ANGLES	1:1			12543H00-6PX-A-HF	ENDE05		
A1	Update drawing	17.01.10	0.0±0.25	X° REF±6°	APPROVED						
A2	Add new Part NO.YB20240423000	24.05.14	0.00±0.15	X° ±3°	DESIGNER			2.54mm PITCH HOUSING			
			0.000±0.08	X° X'±2°	DRAWN	LZH	2024.05.14			REV	A2