
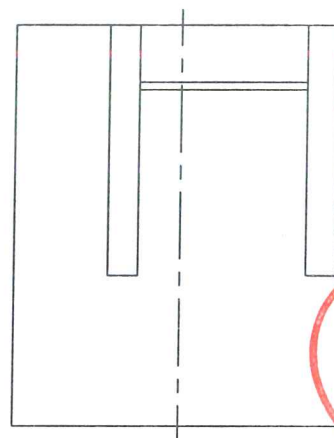
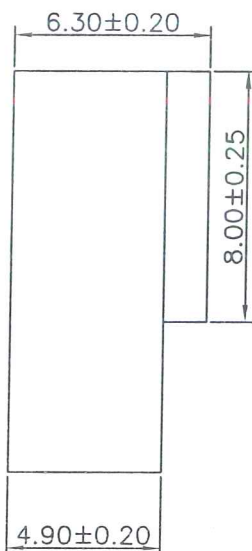


Specifications:

Rated Voltage : 250V AC/DC
 Rated Current : 2.5A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C
 The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

XX : 模穴号

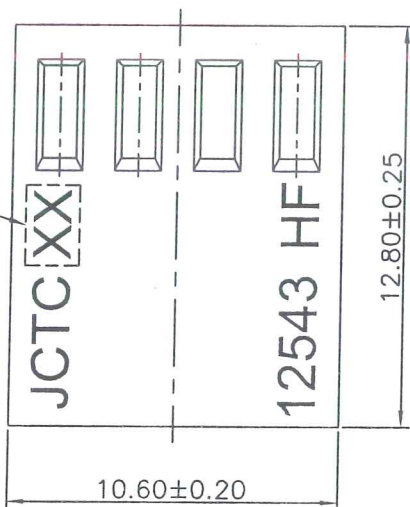

12543H00-NPX-A-HF

① ② ③④⑤⑥

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
Blank: Natural type
- ⑤ A : Mount type
- ⑥ HF : Halogen Free



Part No.	Material	Color	Toner
12543H00-4PJ-A-HF	Nylon66,UL 94V-0	灰色无齿	424C
12543H00-4PM-A-HF	Nylon66,UL 94V-0	米黄色无齿	---
12543H00-4PK-A-HF	Nylon66,UL 94V-0	白色无齿	---

REV.	REVISION RECORD	DATE	UNIT: MM	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	PART. NO:	DWG. NO:	JCTC® TERMINAL&CONNECTORS
C3	增加蓝色规格	13. 09. 25		LINER 0.00±0.15		Nelson	4/10/21	12543H00-NPX-A-HF	ENDE05	
C4	HN1407290134	14. 07. 29		ANGLES X° REF±6°				TITLE: 2.54mm PITCH HOUSING		
C5	更新公司名称	17. 01. 10		X° ±3°						
C6	HN2105100117	21. 04. 20	A4	X° X'±2°		QYX	21. 04. 20			

REV: C6 SHEET: 1/1