
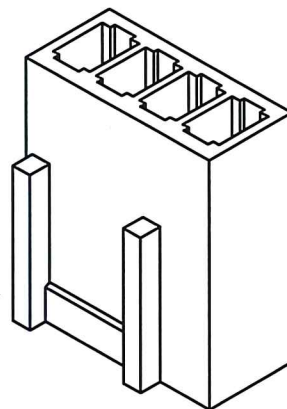


环保物料

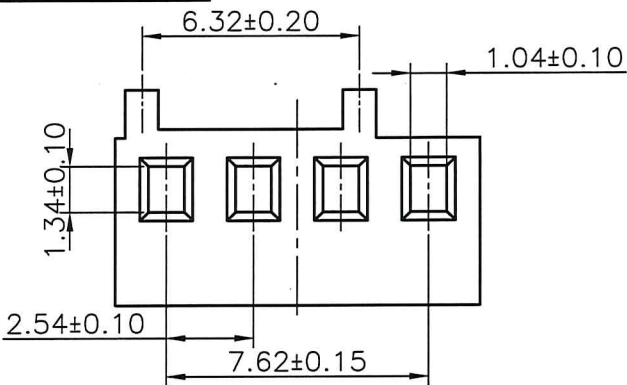

Specifications:




Rated Voltage : 250V AC/DC
 Rated Current : 2.5A AC,DC
 Withstand Voltage : 1000V AC/minute
 Contact Resistance : 20mΩ(MAX.)
 Insulation Resistance : 1000MΩ(MIN.)
 Temperature Range : -25°C~+85°C

12543H00-NPX-A

① ② ③④⑤

- ① Series No.
- ② H90 : Side Contact
H00 : Up Contact
- ③ No. of Circuits
- ④ X : Product color(A--Y)
Blank: Natural type
- ⑤ A : Mount type

XXX : 模穴号

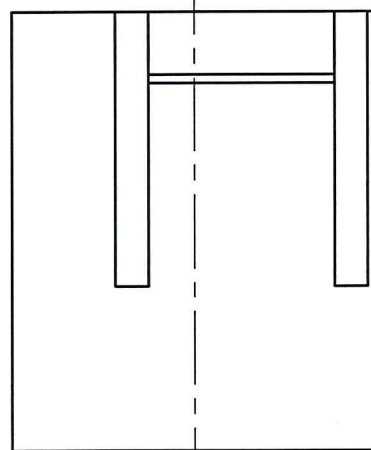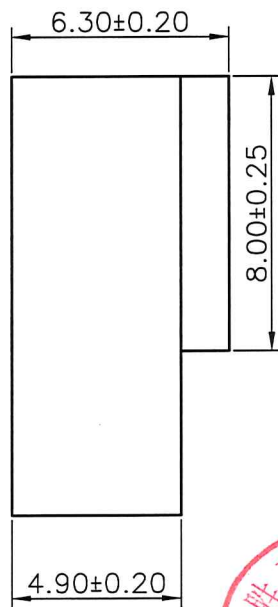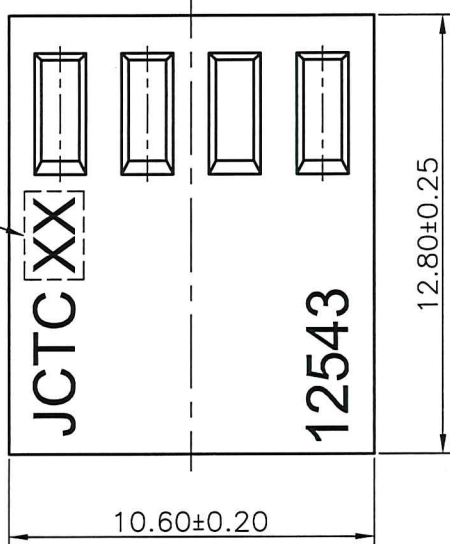

Part No.	Material	Color
12543H00-4PA-A	Nylon66,UL 94V-0	黑色
12543H00-4PB-A	Nylon66,UL 94V-0	棕色
12543H00-4PK-A	Nylon66,UL 94V-0	白色
12543H00-4PG-A	Nylon66,UL 94V-0	蓝色
12543H00-4PM-A	Nylon66,UL 94V-0	米黄色
12543H00-4PB-M	Nylon66,UL 94V-0	砖红色

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	JCTC® 胜蓝科技股份有限公司 TERMINAL&CONNECTORS 东莞市富智达电子科技有限公司	PART. NO:
C2	HN1206010039	12. 06. 01	LINEAR	1:1				12543H00-NPX-A
C3	增加蓝色规格	13. 09. 25	0.0±0.25	ANGLES	APPROVED		DWG. NO:	
C4	HN1407290134	14. 07. 29	0.00±0.15	X° REF±6°	DESIGNER		ENDE05	
C5	更新公司名称	17. 01. 10	0.000±0.08	X° X'±2°	DRAWN		REV: C5 SHEET: 1/1	
							TITLE: 2.54mm PITCH HOUSING	