

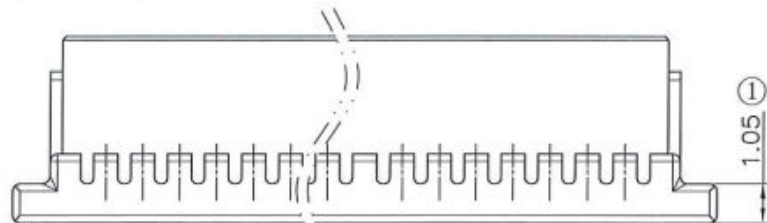


The product using material and processing must conform to the "WI-PZ-142"HSF technical standard control requirements

RoHS+HF

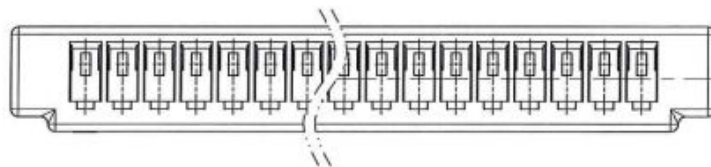


1.05



NOTE:  
 1.MATERIAL SPECIFICATION:  
 1-1.HOUSING:PA66 UL94V-0  
 2.ELECTRICAL PERFORMANCE:  
 2-1.INSULATION RESISTANCE: 100MΩ MIN  
 2-2.WITHSTANDING VOLTAGE: 500V AC/minute  
 3.ENVIRONMENTAL PERFORMANCE:  
 OPERATING TEMPERATURE: -25°C~+85°C.  
 4.PACKAGE SPEC: PE BAG  
 5.P/N:

A1002 H M-1 XX X 0  
 SERIES NO: H M-1 XX X 0  
 COLOR:  
 A-BLACK  
 S-NATURE  
 K-WHITE  
 PIN Q'PY:  
 02~20  
 ROW NO:  
 1-SINGLE ROW

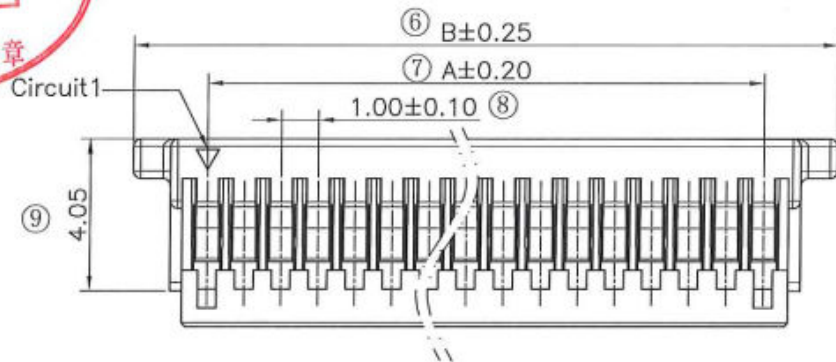

Ordering Information & Dimensions

Circuit	Dimensions(mm)		Circuit	Dimensions(mm)	
	A	B		A	B
02	1.00	5.00	12	11.00	15.00
03	2.00	6.00	13	12.00	16.00
04	3.00	7.00	14	13.00	17.00
05	4.00	8.00	15	14.00	18.00
06	5.00	9.00	16	15.00	19.00
07	6.00	10.00	17	16.00	20.00
08	7.00	11.00	18	17.00	21.00
09	8.00	12.00	19	18.00	22.00
10	9.00	13.00	20	19.00	23.00
11	10.00	14.00			

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE			LINEAR	ANGLES	APPROVED	8/2/24	2024.5.27	A1002HM-1XXX0	ENDE05	
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	梁林秋	2024.5.27	TITLE:	REV: A0	SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	肖雨豪	2024.5.27	PITCH 1.00MM 180° SINGLE ROW HOUSING		