
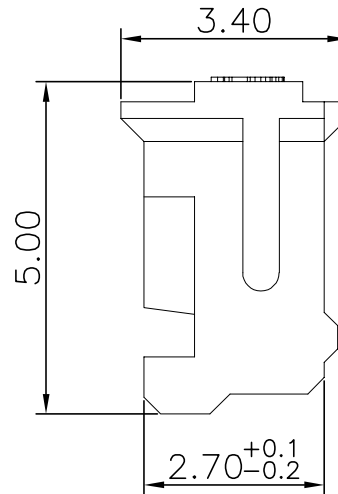
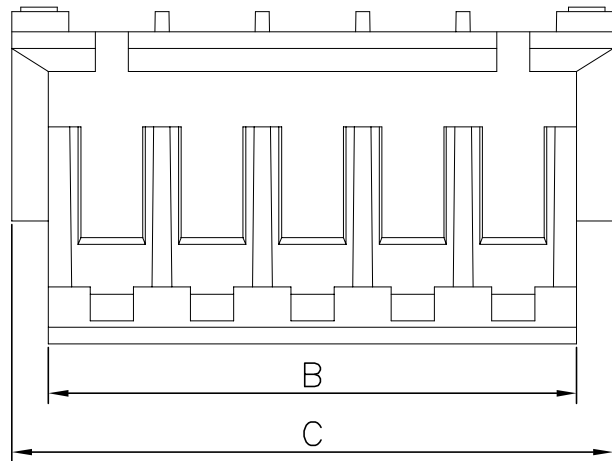
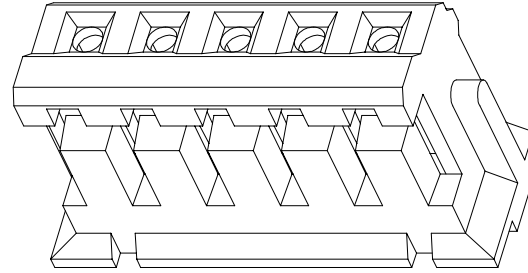


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

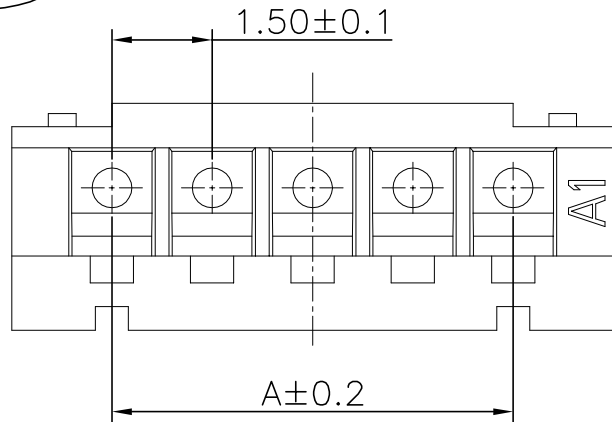


NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA66,UL94V-0
- 2.MECHANICAL PERFORMANCE:
 - 2-1.RETENTIVITY FORCE: 0.6KGF/PIN min
 - 2-2.DURABILITY: 50 CYCLES.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 1A
 - RATED VOLTAGE : 50V AC/DC
 - 3-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 500MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:


SERIES NO: A1501 H M-1 XX X 1
 COLOR: A-BLACK, K-WHITE(低温料), M-BEIGE(高温料)
 CONNECTOR: H-HOUSING, PIN Q'PY: 02~16
 MALE FEMALE: M-MALE, ROW NO: 1-SINGLE ROW

Circuit	Dimensions(mm)			Circuit	Dimensions(mm)		
	A	B	C		A	B	C
02	1.50	3.40	4.50	10	13.50	15.40	16.50
03	3.00	4.90	6.00	11	15.00	16.90	18.00
04	4.50	6.40	7.50	12	16.50	18.40	19.50
05	6.00	7.90	9.00	13	18.00	19.90	21.00
06	7.50	9.40	10.50	14	19.50	21.40	22.50
07	9.00	10.90	12.00	15	21.00	22.90	24.00
08	10.50	12.40	13.50	16	22.50	24.40	25.50
09	12.00	13.90	15.00				

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.10.28		SIZE: A4	LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28	A1501HM-1XXX1	
			0.00±0.25		X'±3'	CHECK	XueZe_Ma	22.10.28	TITLE:		REV: A0
				0.00±0.35	X*REF±6'	DRAWN	LanXuan_Hou	22.10.28	Pitch1.50 mm ZH单排公胶壳		SHEET: 1/2

The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

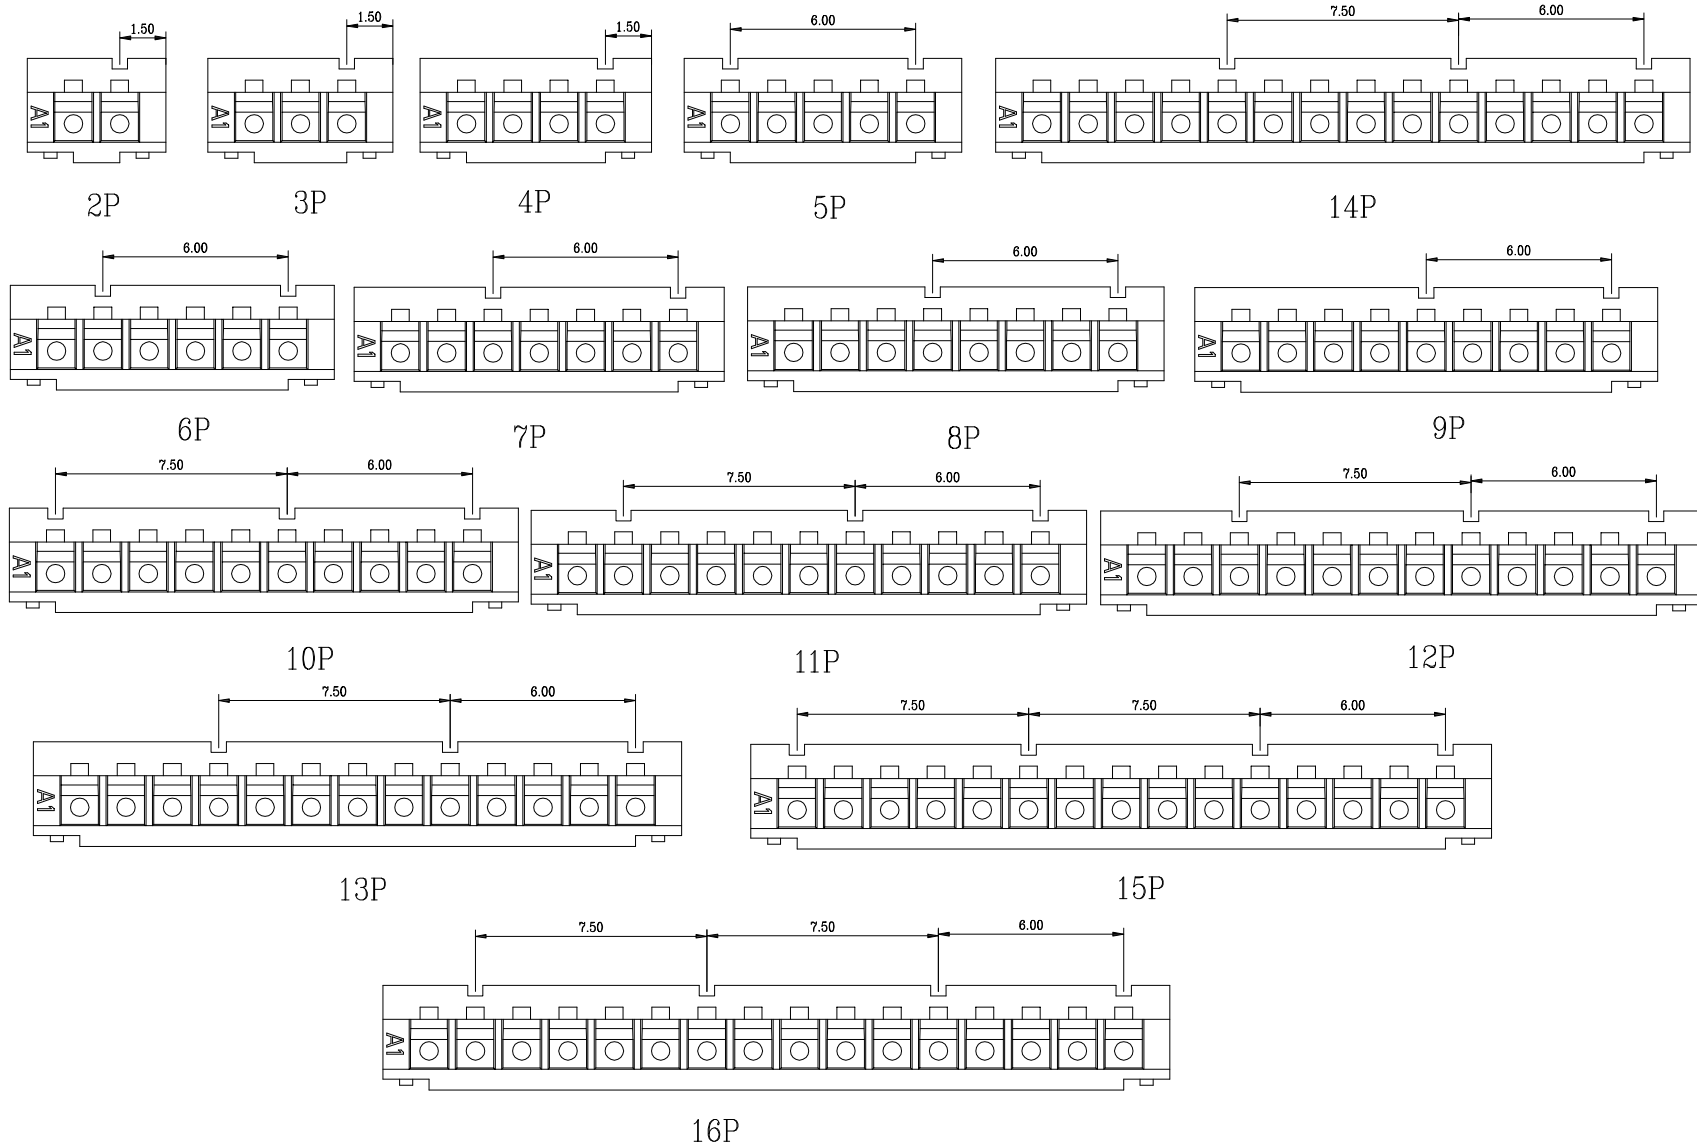

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A1501HM-1XXX1	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28				
			UNIT:mm	0.00±0.25	X'±3'	CHECK	XueZe_Ma	22.10.28	TITLE:	REV: A0		SHEET: 2/2
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	LanXuan_Hou	22.10.28	Pitch1.50 mm ZH单排公胶壳			