

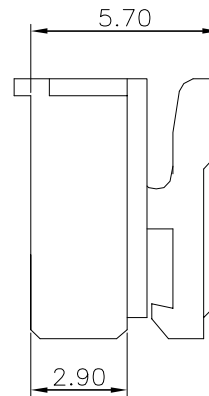
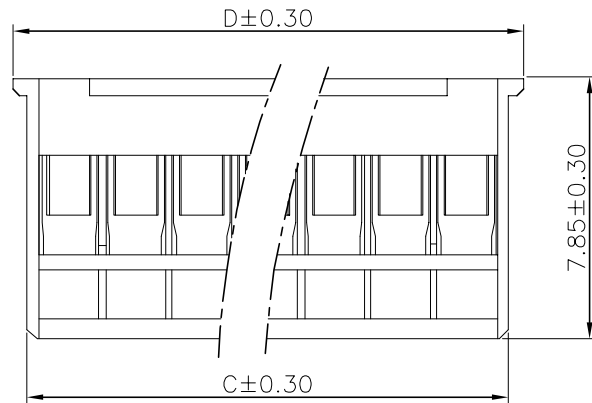


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

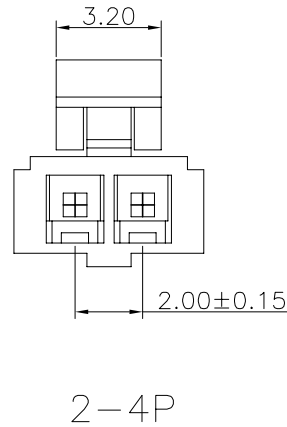

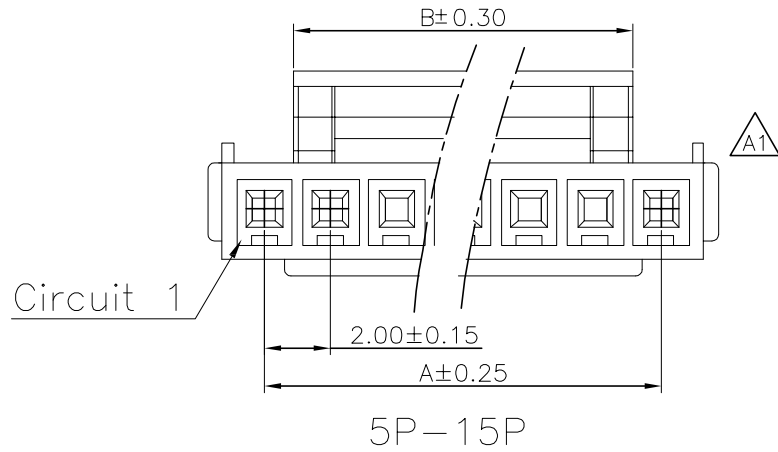

NOTE:

- 1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66,UL94V-0
- 2.ELECTRICAL PERFORMANCE:
2-1.CURRENT RATING: 2A AC/DC
2-2.CONTACT RESISTANCE: 20 mΩ MAX
2-3.INSULATION RESISTANCE: 1000MΩ Min
2-4.DIELECTRIC WITHSTANDING : 1000V/MINUTE
- 3.ENVIRONMENTAL PERFORMANCE:
3-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 4.PACKAGE SPEC: Pe bag
- 5.P/N:

SERIES NO: A2008 H 1 M-1 XX X 0
 CONNECTOR: H-HOUSING
 TYPE CODE:
 MALE FEMALE: M-MALE
 COLOR: A-BLACK S-NATURE
 PIN Q'PY: 02~20
 ROW NO: 1-SINGLE ROW

Circuits	Dimensions(mm)			
	A	B	C	D
02	2.00	3.20	4.60	5.60
03	4.00	4.00	6.60	7.60
04	6.00	5.00	8.60	9.60
05	8.00	6.20	10.60	11.60
06	10.00	8.20	12.60	13.60
07	12.00	10.20	14.60	15.60
08	14.00	12.20	16.60	17.60
09	16.00	14.20	18.60	19.60
10	18.00	12.20	20.60	21.60
11	20.00	14.20	22.60	23.60
12	22.00	16.20	24.60	25.60
13	24.00	18.00	26.60	27.60
14	26.00	20.20	28.60	29.60
15	28.00	22.20	30.60	31.60

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.11.17	LINEAR	ANGLES	1:1	Wang_jr	23.04.11	A2008H1M-1XXX0	ENDE05	
A1	Appearance change	23.04.11	0.0±0.35	X'REF±6'		Han_Gao	23.04.11	TITLE: Pitch2.00mm 180°HY单排带扣 Housing PA66 HF		 WanLian Technology Co., Ltd
			UNIT:mm	X'±3'		LX_HOU	23.04.11			
			SIZE: A4	X'X' ±2'						

REV: A1 SHEET: 1/1