
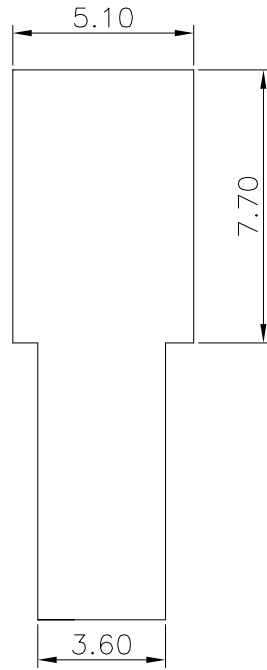
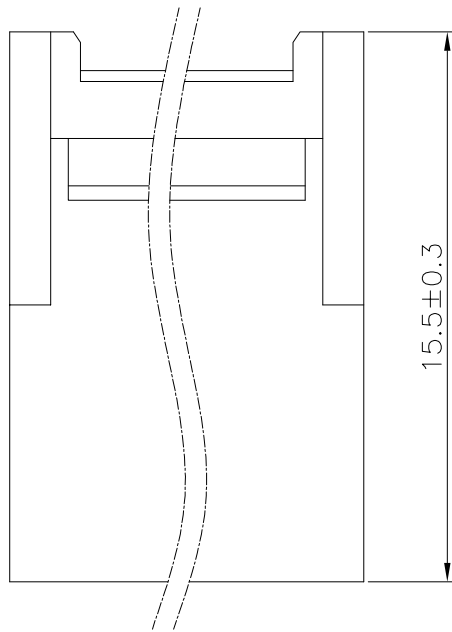


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

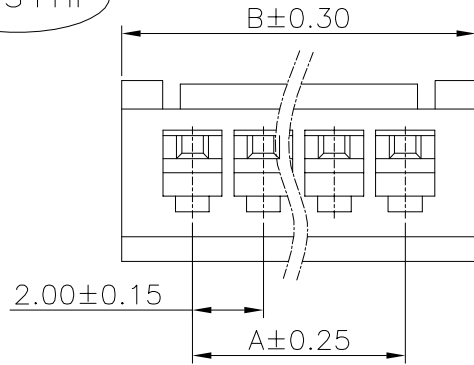

NOTE:

- 1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA66,UL94V-0
- 2.ELECTRICAL PERFORMANCE:
2-1.CURRENT RATING: 2A AC/DC
2-2.CONTACT RESISTANCE: 20 mΩ MAX
2-3.INSULATION RESISTANCE: 1000MΩ Min
2-4.DIELECTRIC WITHSTANDING : 1000V
- 3.ENVIRONMENTAL PERFORMANCE:
3-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 4.PACKAGE SPEC: PE BAG
- 5.P/N:

SERIES NO: A2008 H F-1 XX X 0

CONNECTOR:
H-HOUSING

MALE FEMALE:
F-FEMALE

COLOR:
A-BLACK
K-WHITE
S-NATURE

PIN Q' PY:
02~16

ROW NO:
1-SINGLE ROW

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
02	2.00	6.00	10	18.00	22.00
03	4.00	8.00	11	20.00	24.00
04	6.00	10.00	12	22.00	26.00
05	8.00	12.00	13	24.00	28.00
06	10.00	14.00	14	26.00	30.00
07	12.00	16.00	15	28.00	32.00
08	14.00	18.00	16	30.00	34.00
09	16.00	20.00			

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	21.11.17		0.00±0.25	LINEAR	ANGLES	1:1	Wang_jr	21.11.17	A2008HF-1XXX0	
			0.00±0.10	0.0±0.35	X'REF±6'		Han_Gao	21.11.17			REV: A0
			SIZE: A4	0.00±0.25	X'±3'		Zijun_Huang	21.11.17	TITLE: Pitch2.00mm 180°HY单排带扣 Female Housing PA66无卤		SHEET: 1/1