


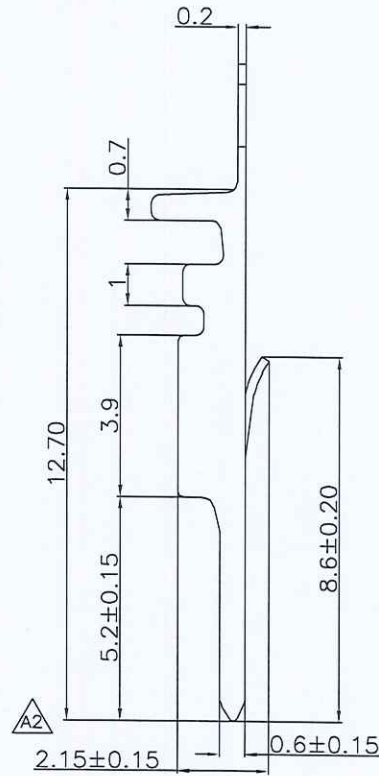


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS

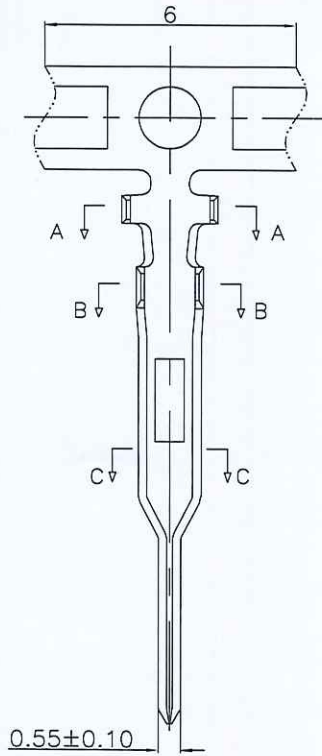

SECTION:A-A



SECTION:B-B



SECTION:C-C

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.TERMINAL: PHOSPHOR BRONZE
- 2.PLATING SPECIFICATION:
 - 2-1.TERMINAL: TIN/GOLD FLASH PLATED OVER ALL.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 2A AC/DC
 - 3-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 1000V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.WIRE RANGE: AWG22#-28#
- 6.PACKAGE SPEC: REEL
- 7.P/N:

SERIES NO: A2008 T M X-X
 CONNECTOR: T-TERMINAL
 MALE FEMALE: F-FEMALE M-MALE
 PLATING:
 1-G/F
 A-ALL AU G/F
 C-BRIGHT TIN
 D-MATTE TIN
 METAL:
 P-PHOSPHOR BRONZE
 B-BRASS



REV.	REVISION RECORD	DATE	UNIT: mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	WanLian Technology Co., Ltd
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1					
A1	Dimensional change	23.04.11	0.0±0.35	X'REF±6'	APPROVED	李学军	23.11.17	A2008TMX-X	ENDE05		
A2	Tolerance change	23.11.17	0.00±0.25	X'±3'	DESIGNER	李学军	23.11.17	TITLE: Pitch2.00mm 180°HY N0 Mark Plug Terminal	REV: A2		SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	李学军		23.11.17		