

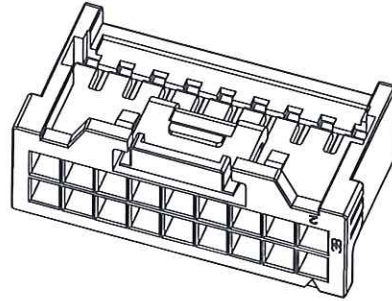
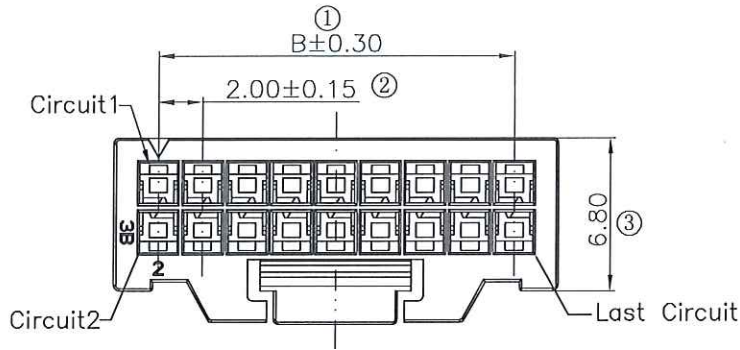


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

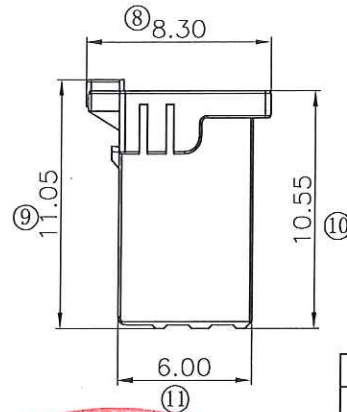

- NOTE:
- MATERIAL SPECIFICATION:
 - HOUSING: PA66,UL94V-0
 - ELECTRICAL PERFORMANCE:
 - INSULATION RESISTANCE: 1000MΩ Min
 - DIELECTRIC WITHSTANDING : 1000V
 - ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
 - PACKAGE SPEC: PE BAG
 - P/N:

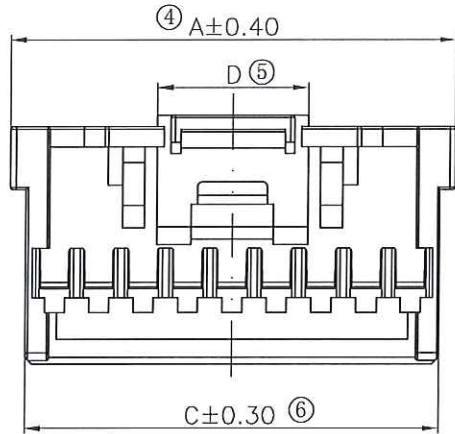

SERIES NO: A2036 H M-2 XX X 0

COLOR:
A-BLACK
S-NATURE

CONNECTOR:
H-HOUSING

MALE FEMALE:
M-MALE

PIN Q'PY:
04~40

ROW NO:
2-DOUBLE ROW


Circuit	A	B	C	D	Circuit	A	B	C	D
2*02	6.0	2.0	4.6	2.2	2*12	26.0	22.0	24.6	6.8
2*03	8.0	4.0	6.6	2.2	2*13	28.0	24.0	26.6	6.8
2*04	10.0	6.0	8.6	3.1	2*14	30.0	26.0	28.6	6.8
2*05	12.0	8.0	10.6	5.1	2*15	32.0	28.0	30.6	6.8
2*06	14.0	10.0	12.6	6.8	2*16	34.0	30.0	32.6	6.8
2*07	16.0	12.0	14.6	6.8	2*17	36.0	32.0	34.6	6.8
2*08	18.0	14.0	16.6	6.8	2*18	38.0	34.0	36.6	6.8
2*09	20.0	16.0	18.6	6.8	2*19	40.0	36.0	38.6	6.8
2*10	22.0	18.0	20.6	6.8	2*20	42.0	38.0	40.6	6.8
2*11	24.0	20.0	22.6	6.8					




REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE:	NAME	DATE	PART.NO:	DWG.NO:
AO	NEW RELEASE		LINEAR	1:1			A2036HM-2XXX0	ENDE05
			ANGLES	APPROVED	梁林积	2024.5.30		
			0.0±0.35	DESIGNER	梁林积	2024.5.30	TITLE:	
			0.00±0.25	DRAWN	肖雨曦	2024.5.30	Pitch2.00mm MX双排带扣Housing 无logo	REV: AO
			0.000±0.10					SHEET: 1/4




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements




2*05P




2*06P




2*07P

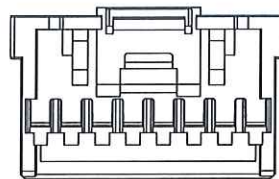


2*08P

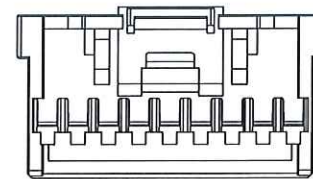


2*09P

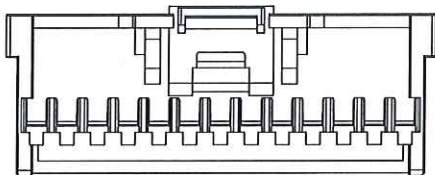


2*13P

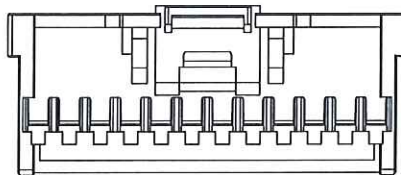


2*12P

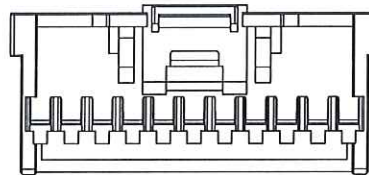


2*11P

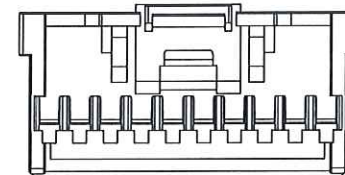


2*10P

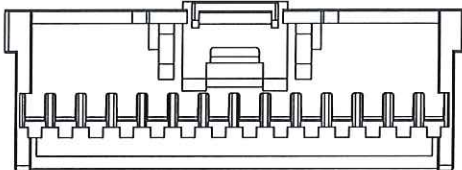


2*14P

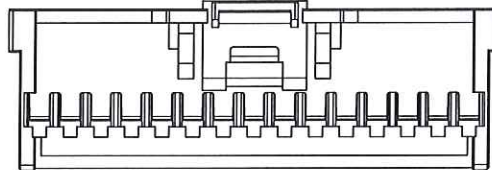


2*15P

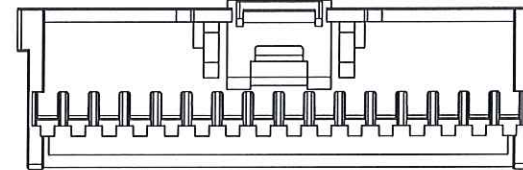


2*16P




2*02P




2*03P

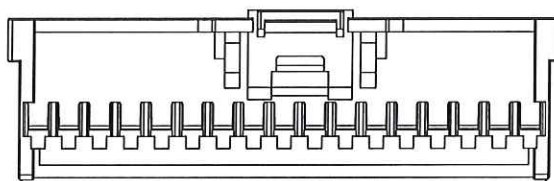


2*17P

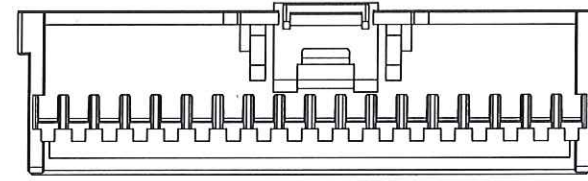


2*18P



2*04P

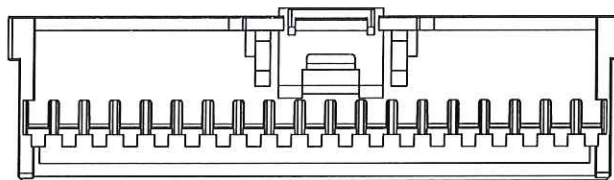

2*19P

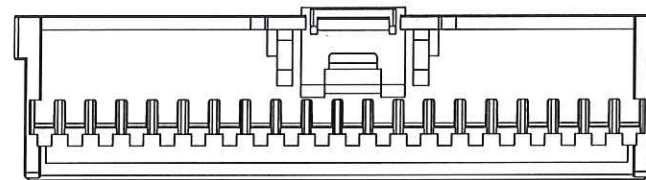


2*20P




REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2036HM-2XXX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
AO	NEW RELEASE			LINEAR	ANGLES	APPROVED	马子海	2024.5.30			
				0.0±0.35	X'REF±6°	DESIGNER	梁林积	2024.5.30	TITLE: Pitch2.00mm MX双排带扣housing 无logo		
				UNIT: mm 0.00±0.25	X'±3'	DRAWN	苗雨晴	2024.5.30			
			SIZE: A4	0.000±0.10	X'X' ±2'				REV: AO	SHEET: 2/4	

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS+HF

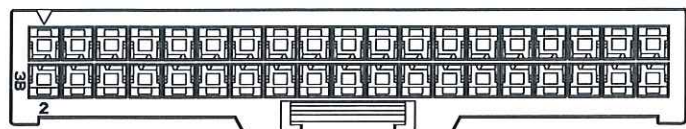


2*19P

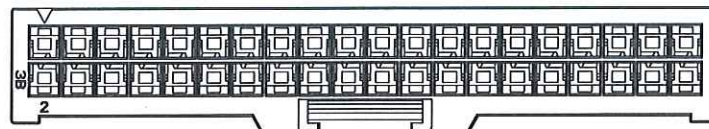


2*20P

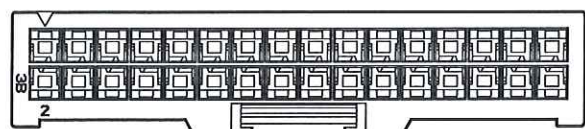


2*16P

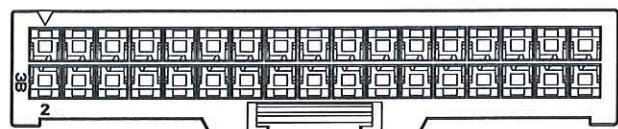


2*17P

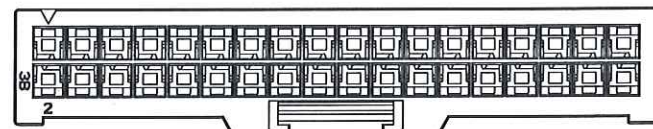


2*18P

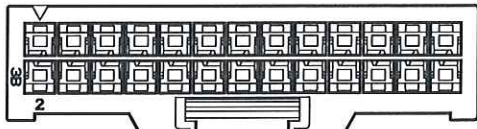


2*13P




2*14P

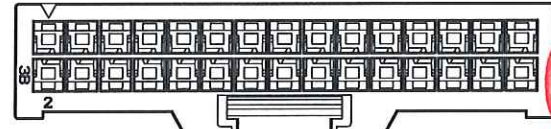


2*15P

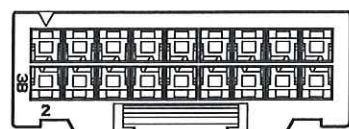

2*09P

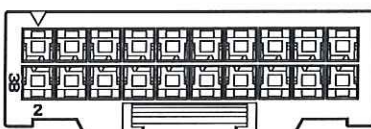

2*10P

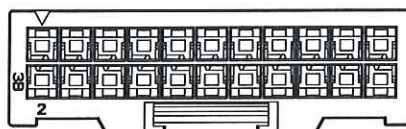


2*11P




2*12P




2*02P




2*03P




2*04P




2*05P



2*06P



2*07P




2*08P

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: A2036HM-2XXX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
AO	NEW RELEASE			LINEAR	ANGLES	APPROVED	马子洋	2024.5.30			
				0.0±0.35	X'REF±6°	DESIGNER	梁林积	2024.5.30	TITLE: Pitch2.00mm MX双排带扣Housing 无logo		
				UNIT: mm	0.00±0.25	X'±3°	DRAWN	肖雨曦	2024.5.30		
			SIZE: A4	0.000±0.10	X'X' ±2'				REV: AO	SHEET: 3/4	

The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS+HF

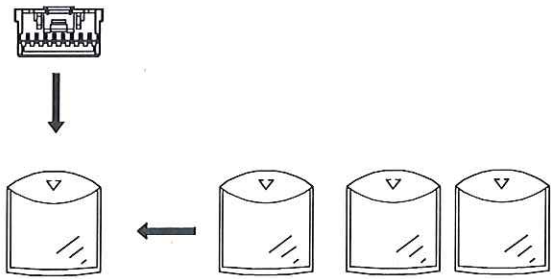

1. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充;
2. 因生产Pin位未齐全, 每袋与整箱包装数量仅供参考, 具体包装数量以实际出货为准, 或批量出货更新后为准:



PIN 位	包装数量 (KPCS)
(2*02~2*05P)	2000PCS/BAG
(2*06~2*10P)	1000PCS/BAG
(2*11~2*20P)	500PCS/BAG

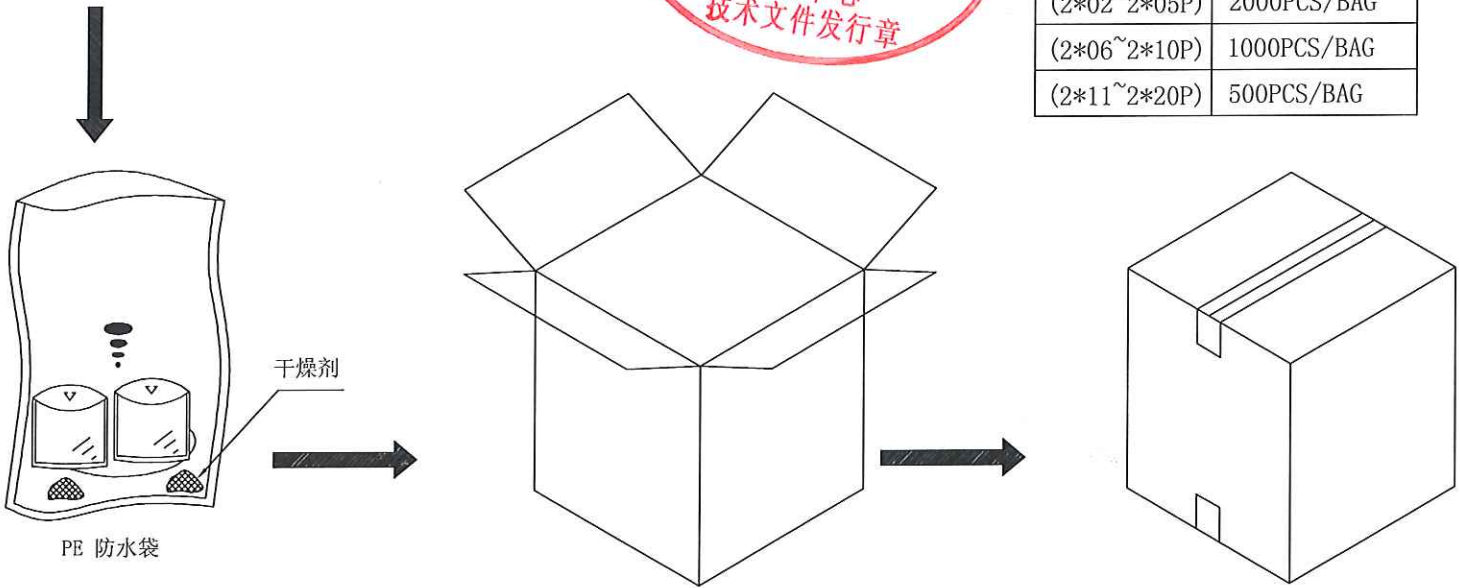

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE		LINEAR	ANGLES	1:1	梁林积	2024.5.30	A2036HM-2XXX0	ENDE05	
			0.0±0.35	X'REF±6'		梁林积	2024.5.30	TITLE:		REV: AO SHEET: 4/4
			0.00±0.25	X'±3'		黄雨曦	2024.5.30	Pitch2.00mm MX双排带扣Housing 无logo		
			UNIT: mm	0.00±0.25						
			SIZE: A4	0.000±0.10						