



The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

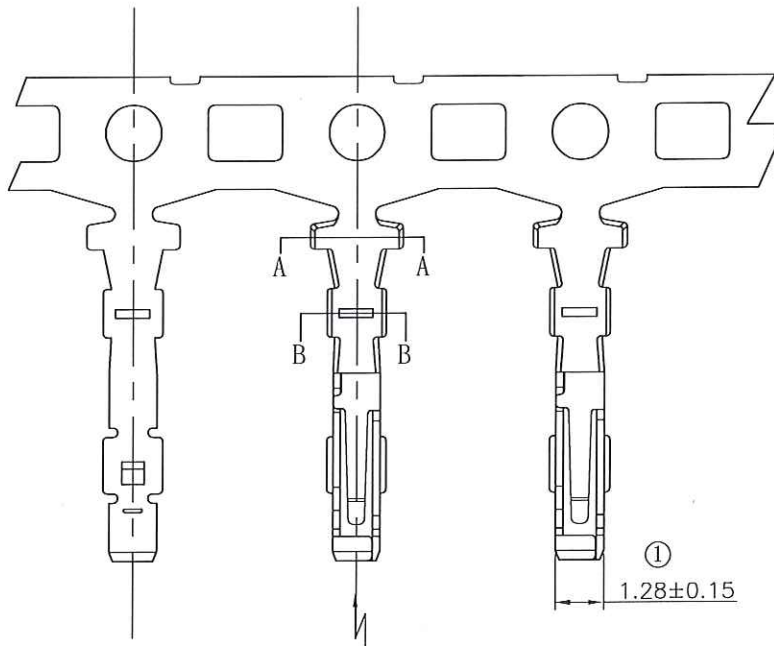


K direction

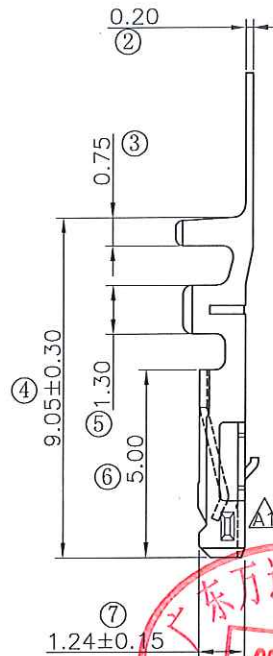


NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.TERMINAL: PHOSPHOR BRONZE
- 2.PLATING SPECIFICATION:
 - 2-1.TERMINAL: TIN/GOLD FLASH PLATED OVER ALL.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 2.0A AC/DC
 - 3-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 1000V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
- 5.PACKAGE SPEC: REEL
- 6.P/N:


SERIES NO: A2036 T F X-X
 CONNECTOR: T-TERMINAL
 MALE FEMALE: F-FEMALE
 PLATING:
 A-ALL AU G/F
 C-BRIGHT TIN
 D-MATTE TIN
 METAL:
 P-PHOSPHOR BRONZE
 B-BRASS




SECTION:A-A



SECTION:B-B



K direction

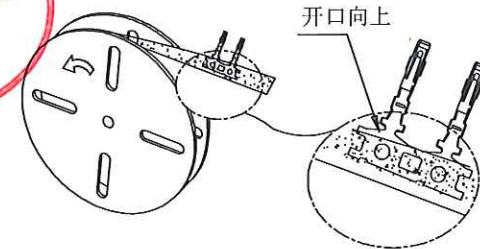

Ordering Information & Specifications

Wire Range	Insulation O.D.	Qty/reel
AWG#22-#28	1.50mm(max)	10,000pcs

REV.	REVISION RECORD	DATE	UNITED STATES PATENT & TRADEMARK OFFICE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	WanLian Technology Co., Ltd
A0	NEW RELEASE	21.10.12		LINEAR	ANGLES	1:1	3/8 潘	2024.5.30	A2036TFX-X	ENDE05	
A1	Modify structure	22.09.16	0.0±0.35	X'REF±6°	DESIGNER	梁林积	2024.5.30	TITLE: Pitch2.00mm Crimp Terminal No Mark	REV: A2	SHEET: 1/1	
A2	变更料号		0.00±0.25	X'±3'	DRAWN	肖雨晴	2024.5.30				
			0.000±0.10	X'X' ±2°							