
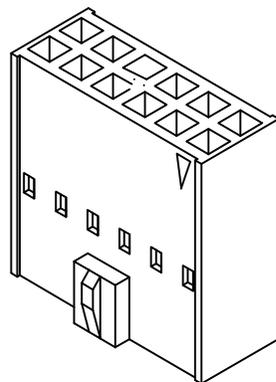


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

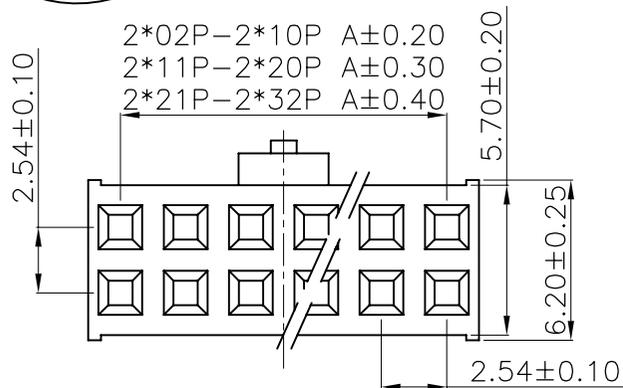

Poles	Dimensions(mm)	
	A	B
04	2.54	5.08
06	5.08	7.62
08	7.62	10.16
10	10.16	12.70
12	12.70	15.24
14	15.24	17.78
16	17.78	20.32
18	20.32	22.86
20	22.86	25.40
22	25.40	27.94
24	27.94	30.48
26	30.48	33.02
28	33.02	35.56
30	35.56	38.10
32	38.10	40.64
34	40.64	43.18
36	43.18	45.72
38	45.72	48.26
40	48.26	50.80
42	50.80	53.34
44	53.34	55.88
46	55.88	58.42
48	58.42	60.96
50	60.96	63.50
52	63.50	66.04
54	66.04	68.58
56	68.58	71.12
58	71.12	73.66
60	73.66	76.20
62	76.20	78.74
64	78.74	81.28

NOTE:

- MATERIAL SPECIFICATION:
 - HOUSING: PBT, UL94V-0
- MECHANICAL PERFORMANCE:
 - RETENTION FORCE: 1.5kgf/pin min
 - DURABILITY: 50 CYCLES.
- ELECTRICAL PERFORMANCE:
 - RATED CURRENT : 3A AC/DC
RATED VOLTAGE : 250V AC/DC
 - INSULATION RESISTANCE: 1000MΩ MIN
 - CONTACT RESISTANCE : 20mΩ MAX
 - WITHSTANDING VOLTAGE: 1500V AC/MINUTE
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -25°C~+85°C.
- PACKAGE SPEC: 1000PCS/BAG/每袋 (1000PCS)

6.P/N:

A2548 H M-2 XX X 0

SERIES NO:


CONNECTOR:
H-HOUSING

MALE FEMALE:
M-MALE

COLOR:
A-BLACK
K-WHITE
S-NATURE

PIN Q'PY:
04~64

ROW NO:
2-DOUBLE ROW

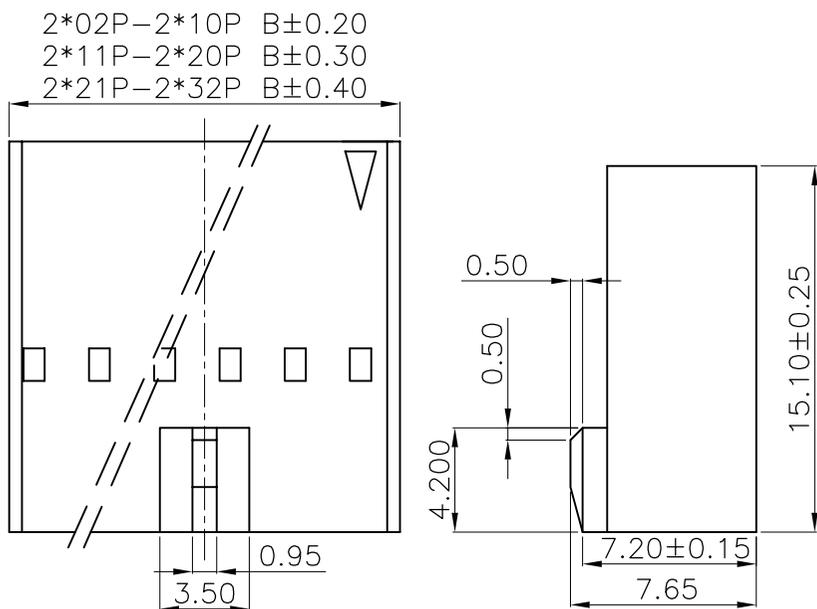

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Teconology Co., Ltd
A0	NEW RELEASE	21.11.12	LINEAR	ANGLES	1:1	Wang_jr	21.01.13	A2548HM-2XXX0	ENDE05	
			0.0±0.35	X'REF±6'	APPROVED	Han_Gao	21.01.13	TITLE: Pitch 2.54mm MX双排带扣胶壳		REV: A0 SHEET: 1/1
			0.00±0.25	X'±3'	DESIGNER	Zijun_Huang	21.01.13			
			0.000±0.10	X'X' ±2'	DRAWN					