



The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements


RoHS

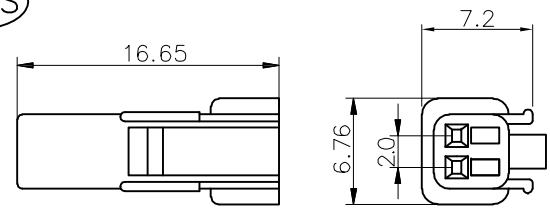


C2004HM-102K0

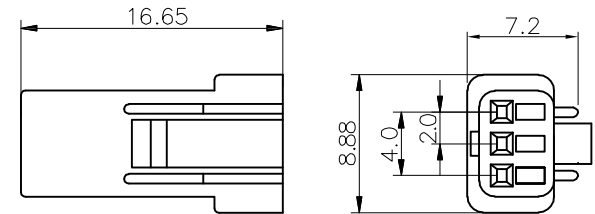


C2004HM-103K0

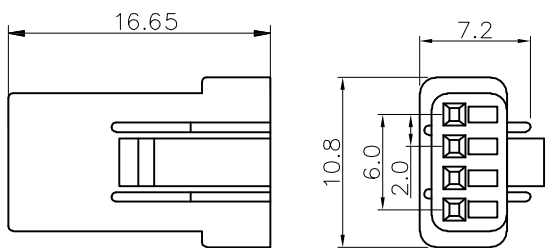

C2004HM-104K0

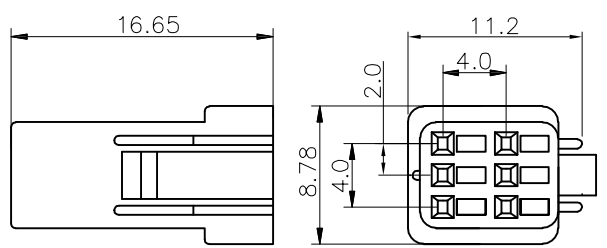

C2004HM-206K0

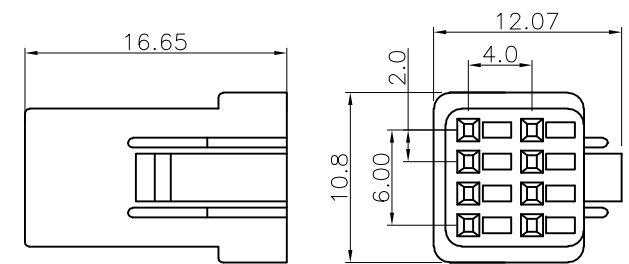

C2004HM-208K0

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: PBT,UL94V-0
 2.MECHANICAL PERFORMANCE:
 2-1.RETENTIVITY FORCE: 1.2kgf/pin min
 2-2.DURABILITY: 30 CYCLES.
 3.ELECTRICAL PERFORMANCE:
 3-1.CURRENT RATING: 3A AC/DC
 RATED VOLTAGE : 100V AC/DC
 3-2.CONTACT RESISTANCE: 10 mΩ MAX
 3-3.INSULATION RESISTANCE: 1000MΩ Min
 3-4.DIELECTRIC WITHSTANDING : 1000V
 4.ENVIRONMENTAL PERFORMANCE:
 4-1.OPERATING TEMPERATURE: -25°C~+85°C.
 5.PACKAGE SPEC: PE BAG
 6.P/N:
 C2004 H M-1 XX X 0
 SERIES NO: [] [] [] [] [] [] [] []
 CONNECTOR: [] [] [] [] [] [] [] []
 H-HOUSING
 MALE FEMALE: [] [] [] [] [] [] [] []
 M-MALE
 COLOR:
 A-BLACK
 K-WHITE
 S-NATURE
 PIN Q'PY:
 02~08
 ROW NO:
 1-SINGLE ROW
 2-DOUBLE ROW

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: C2004HM-1XXX0 C2004HM-2XXX0	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17				
			UNIT:mm	0.00±0.25	X°±3°	DESIGNER	Han_Gao	21.11.17	TITLE: Pitch2.00mm JWPF线对线 防水IP67 Male Housing		REV: A0	SHEET: 1/1
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	Zijun_Huang	21.11.17				