
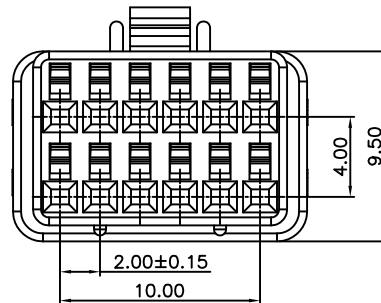
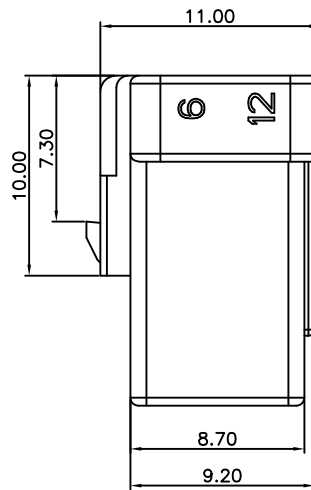
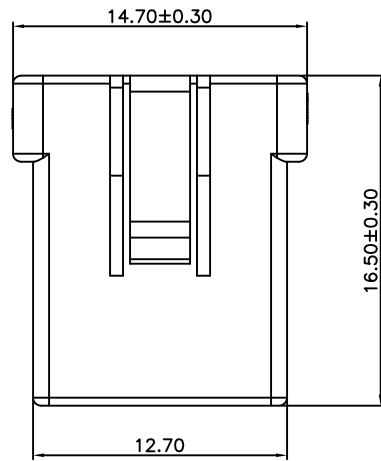



The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

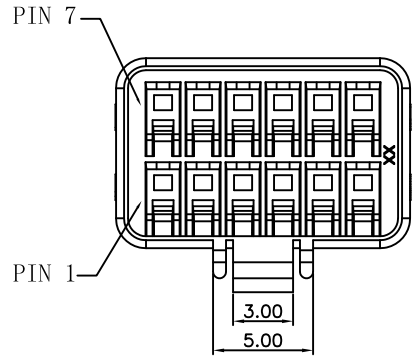

- NOTE:
- MATERIAL SPECIFICATION:
    - HOUSING: PBT,UL94V-0
  - ELECTRICAL PERFORMANCE:
    - CURRENT RATING: 3A
    - CONTACT RESISTANCE: 20 mΩ MAX
    - INSULATION RESISTANCE: 1000MΩ Min
    - DIELECTRIC WITHSTANDING : 1000V AC
  - ENVIRONMENTAL PERFORMANCE:
    - OPERATING TEMPERATURE: -40°C~+105°C.
  - PACKAGE SPEC:
  - P/N:

SERIES NO: C2004 H M-2 XX X 0

CONNECTOR: H-HOUSING

MALE FEMALE: M-MALE

COLOR: A-BLACK, S-NATURE

PIN Q'PY: 12PIN

ROW NO: 2-DOUBLE ROW

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
AO	NEW RELEASE	22.03.19		LINEAR	1:1	Wang_jr	22.03.19	C2004HM-2XXX0	ENDE05
				0.0±0.35	ANGLES				
			UNIT: mm	0.00±0.25	X°±3°	CHECK	XueZe_Ma	22.03.19	 WanLian Technology Co., Ltd
			SIZE: A4	0.000±0.10	X°X' ±2°	DRAWN	LanXuan_Hou	22.03.19	