
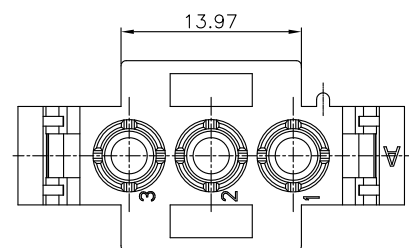

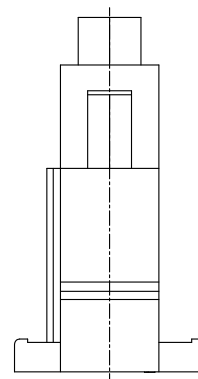
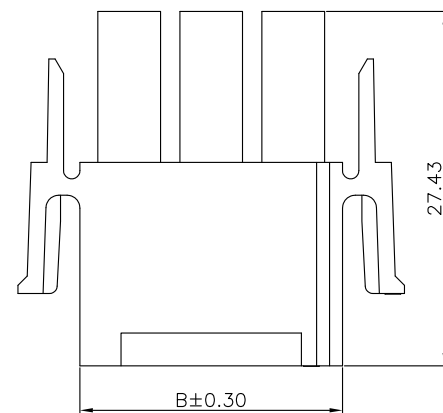
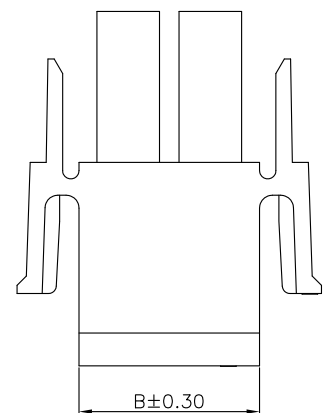
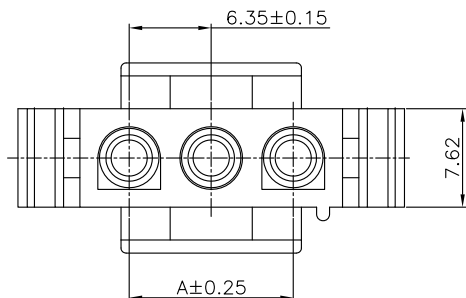


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

02P

03~06P



NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: PA66,UL94V-0

2.ELECTRICAL PERFORMANCE:

2-1.CURRENT RATING: 15A

RATED VOLTAGE : 600V

2-2.CONTACT RESISTANCE: 3.5 mΩ MAX

2-3.INSULATION RESISTANCE: 1000MΩ Min

2-4.DIELECTRIC WITHSTANDING : 5000V AC

3.ENVIRONMENTAL PERFORMANCE:

3-1.OPERATING TEMPERATURE: -25°C~+85°C.

4.PACKAGE SPEC: PE BAG

5.P/N:

C6351 H 1 M-1 XX X X

SERIES NO: H 1 M-1 XX X X
 CONNECTOR: H-HOUSING
 2-TYPE CODE: 2
 MALE FEMALE: M-MALE
 F-FEMALE
 ROW NO: 1-SINGLE ROW

HOUSING:
 0-UL94V-0
 2-UL94V-2

COLOR:
 S-NATURE

PIN Q'PY:
 02~06

Circuit No.	Dimensions	
	A	B
02P	6.35	13.97
03P	12.70	20.32
04P	19.05	26.67
05P	25.40	33.02
06P	31.75	39.37

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
A0	NEW RELEASE	22.03.19	LINEAR	ANGLES	1:1	Wang_jr	22.03.19	C6351H1M-1XXXX	ENDE05
			0.0±0.35	X°REF±6°	APPROVED	XueZe_Ma	22.03.19		
			0.00±0.25	X°±3°	CHECK	LanXuan_Hou	22.03.19	TITLE:	
			0.000±0.10	X°X'±2°	DRAWN			Pitch 6.35mm 单排公壳	



WanLian Technology Co., Ltd

REV: A0 SHEET: 1/1